




Pile Dynamics, Inc.

Pile Dynamics, Inc.

Transducer 8097

Strain ($\mu\epsilon$)

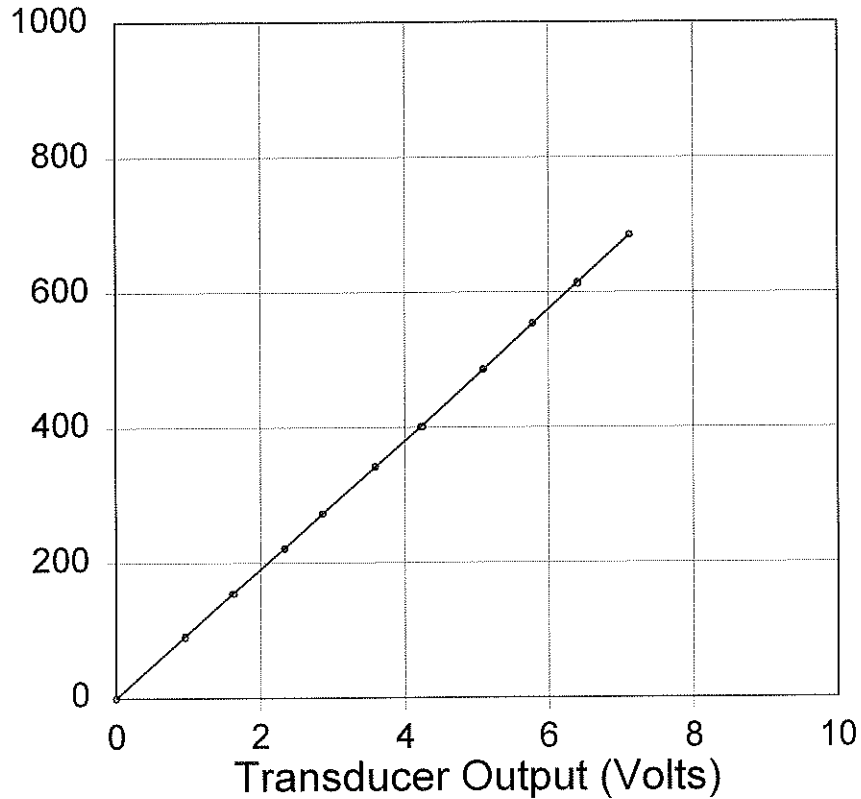

PDA Cal Factor

96.0 $\mu\epsilon/V$

Applied Strain ($\mu\epsilon$)	Transducer Output (Volts)
0	0.00
92	0.95
154	1.62
221	2.33
272	2.86
342	3.59
401	4.22
485	5.09
554	5.79
614	6.40
684	7.12

Shunt (60.4 K Ω)

5.0 V

General Factor

333.3 $\mu\epsilon/mV/V$

Traceable to N.I.S.T.

Calibrated by:

Fred Thomsen

Calibrated on:

29-Dec-2003