




Pile Dynamics, Inc.

Transducer 8954

Strain ($\mu\epsilon$)

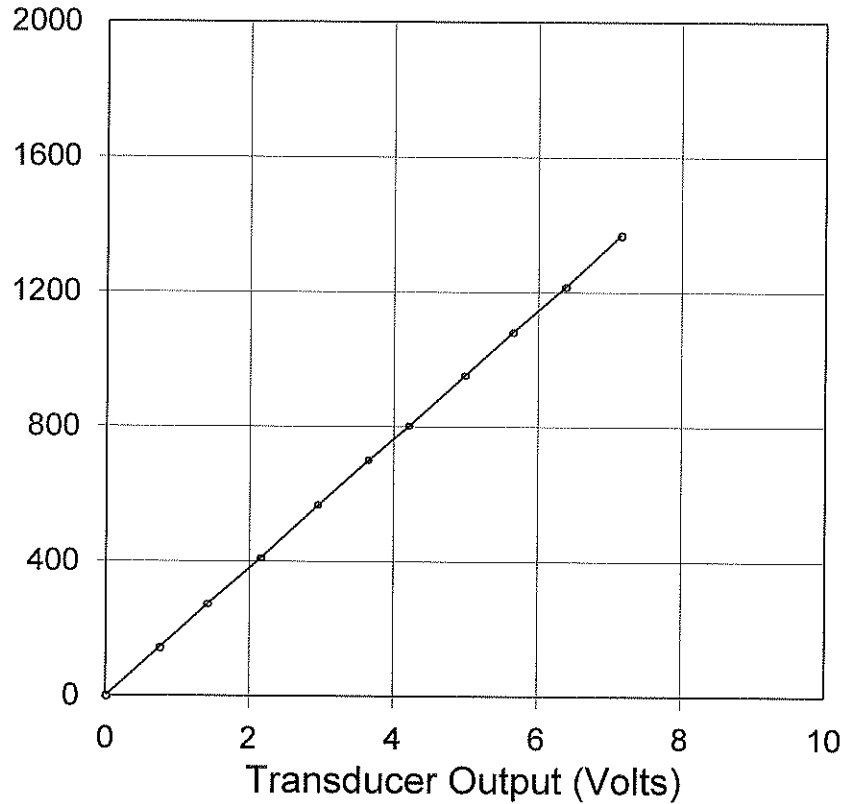

PDA Cal Factor (5.0 V)

95.6 $\mu\epsilon/V$

Applied Strain ($\mu\epsilon$)	Transducer Output (Volts)
0	0.00
144	0.75
272	1.41
407	2.15
567	2.95
700	3.66
801	4.20
952	4.97
1080	5.64
1215	6.37
1368	7.16

Shunt (60.4 K Ω)

2.5 V

General Factor

331.9 $\mu\epsilon/mV/V$

Traceable to N.I.S.T.

Calibrated by:

Fred Hein

Calibrated on:

27-Oct-2005