




Pile Dynamics, Inc.

Pile Dynamics, Inc.

Transducer

8962

Strain ($\mu\epsilon$)

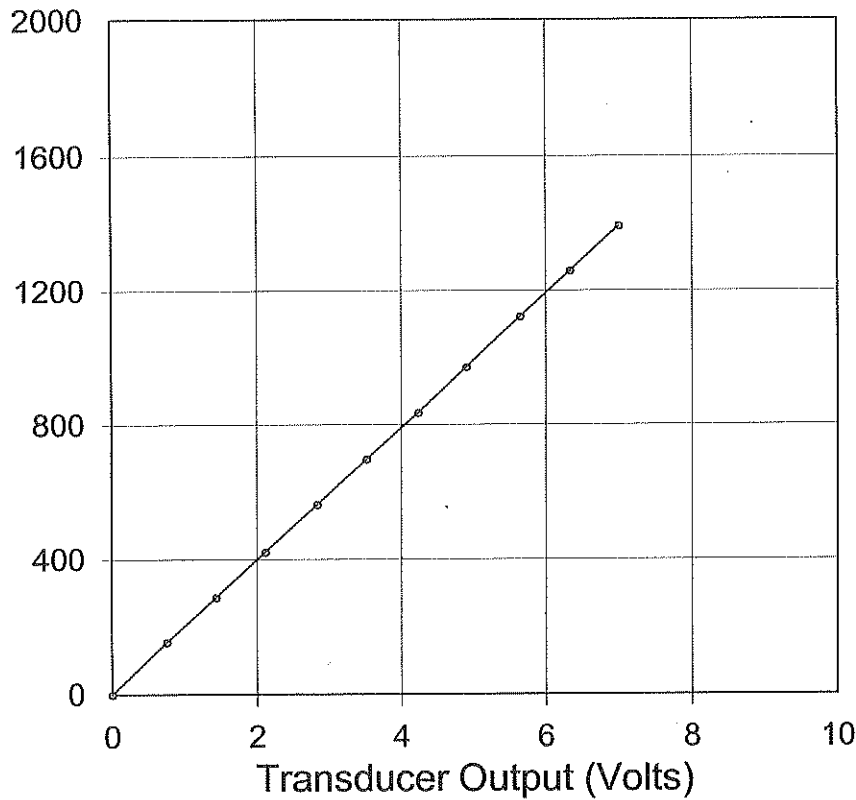

PDA Cal Factor (5.0 V)

99.2 $\mu\epsilon/V$

| Applied Strain ($\mu\epsilon$) | Transducer Output (Volts) |
|----------------------------------|---------------------------|
| 0 | 0.00 |
| 155 | 0.75 |
| 287 | 1.43 |
| 421 | 2.11 |
| 562 | 2.83 |
| 697 | 3.51 |
| 835 | 4.23 |
| 970 | 4.90 |
| 1122 | 5.64 |
| 1259 | 6.33 |
| 1393 | 7.00 |

Shunt (60.4 K Ω)

2.5 V

General Factor

344.6 $\mu\epsilon/mV/V$

Traceable to N.I.S.T.

Strain Transducer Calibrator System 2009 Version 1.3

Calibrated by:

Calibrated on:

23-Nov-2010