


Pile Dynamics Inc Transducer 5116

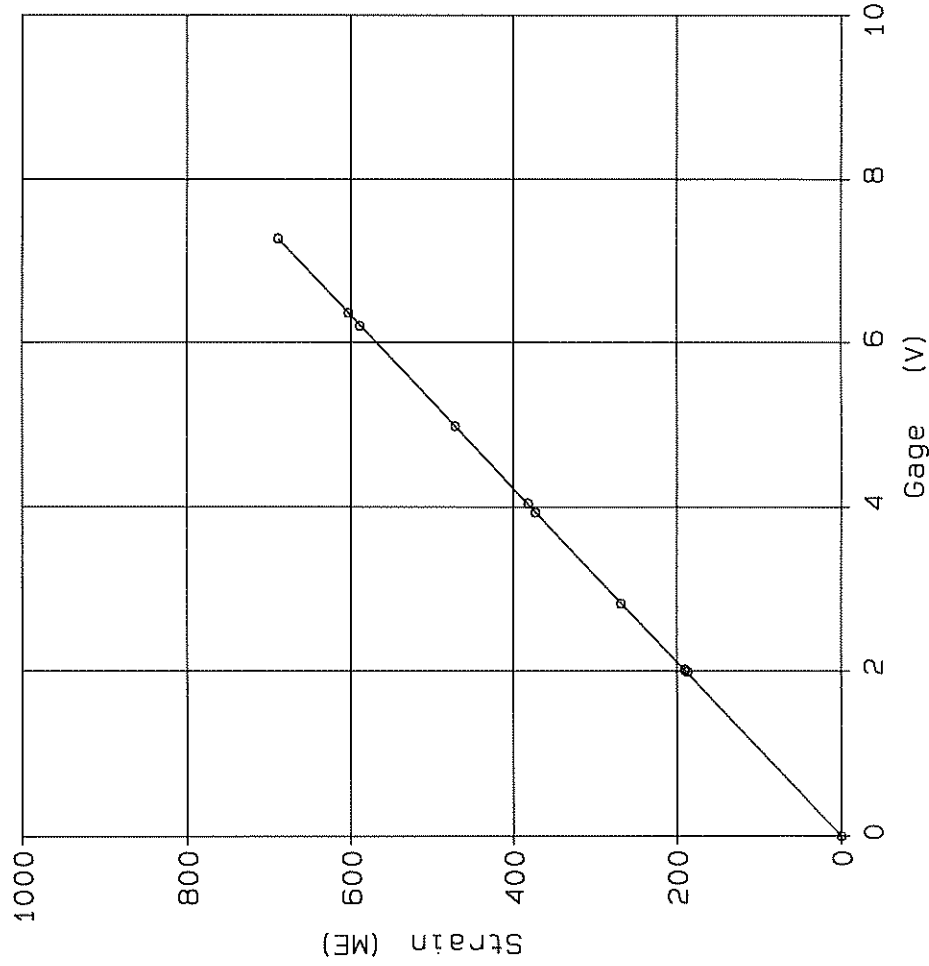

PDA Cal Factor = 95.0 ME/V
 Shunt (60.4KΩ) = 5.0 V
 General Factor = 329.9 ME/mV/V
 Traceable to N.I.S.T.

Strain ME	Gage V
0	.00
191	2.03
190	2.02
188	1.99
268	2.83
374	3.94
383	4.04
473	4.98
589	6.21
604	6.37
690	7.27

Calibrated by: J. D. Dwyer
 Calibrated on: 29-Dec-00