


Pile Dynamics Inc Transducer 5120

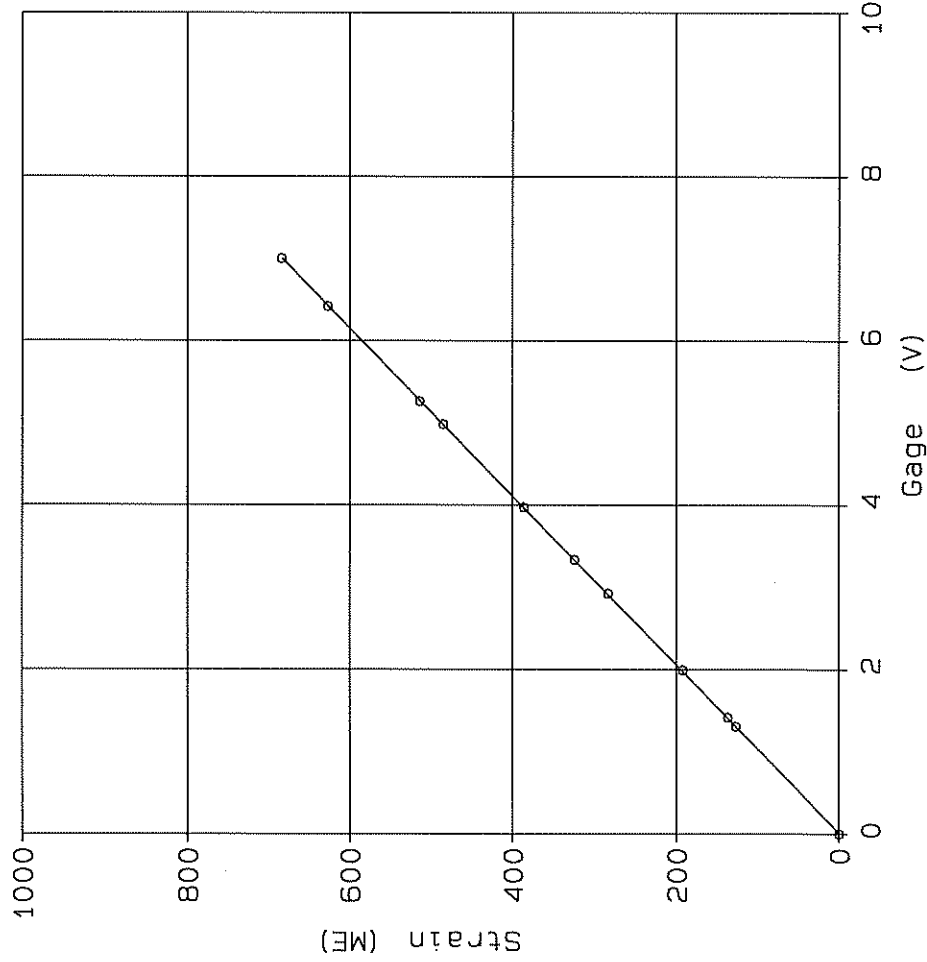

PDA Cal Factor = 97.8 ME/V
 Shunt (60.4K Ω) = 5.0 V
 General Factor = 339.6 ME/mV/V
 Traceable to N.I.S.T.

Strain ME	Gage V
0	.00
127	1.31
137	1.42
193	1.99
284	2.93
324	3.34
386	3.98
485	4.98
514	5.27
627	6.42
685	7.00

Calibrated by: J. Deitchel
 Calibrated on: 16-Jan-01