


Pile Dynamics Inc Transducer 5124

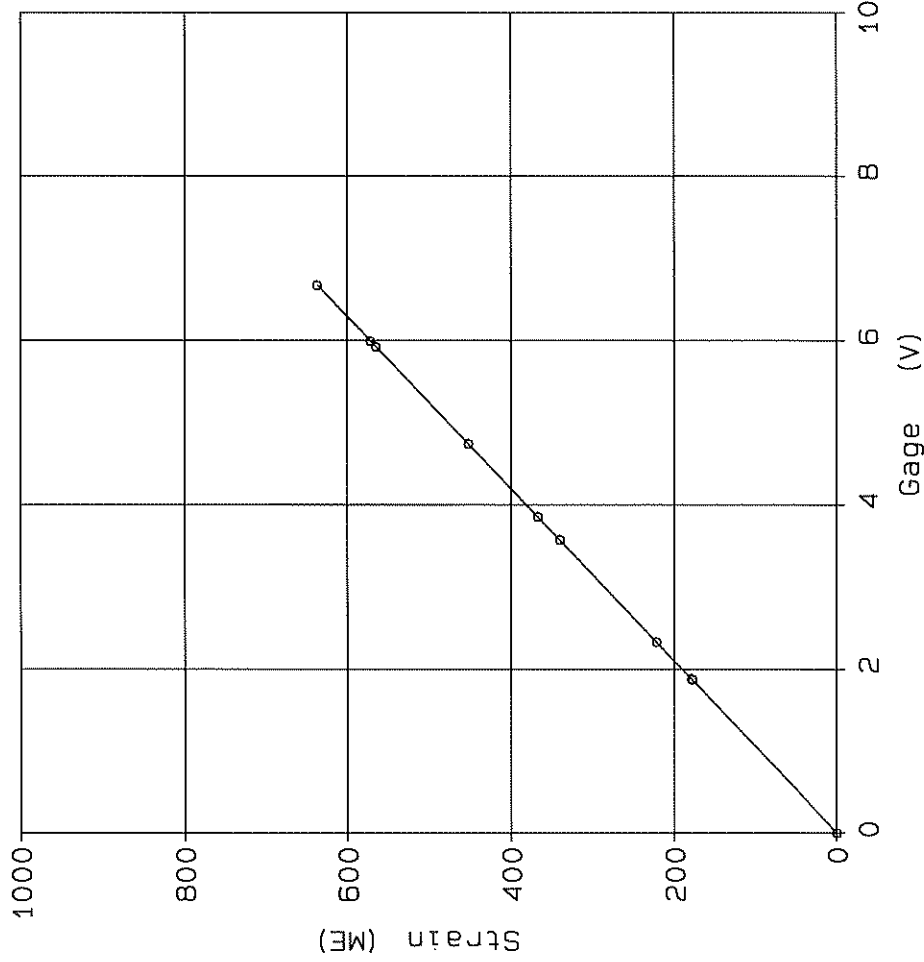

PDA Cal Factor = 95.6 ME/V
 Shunt (60.4KΩ) = 5.0 V
 General Factor = 331.9 ME/mV/V
 Traceable to N.I.S.T.

| Strain ME | Gage V |
|--------------|-----------|
| 0 | .00 |
| 178 | 1.88 |
| 178 | 1.88 |
| 179 | 1.89 |
| 222 | 2.33 |
| 341 | 3.57 |
| 367 | 3.86 |
| 453 | 4.75 |
| 566 | 5.93 |
| 572 | 6.00 |
| 637 | 6.67 |

Calibrated by: *J. Denteloff*
 Calibrated on: 16-Jan-01