


Pile Dynamics Inc Transducer 5127

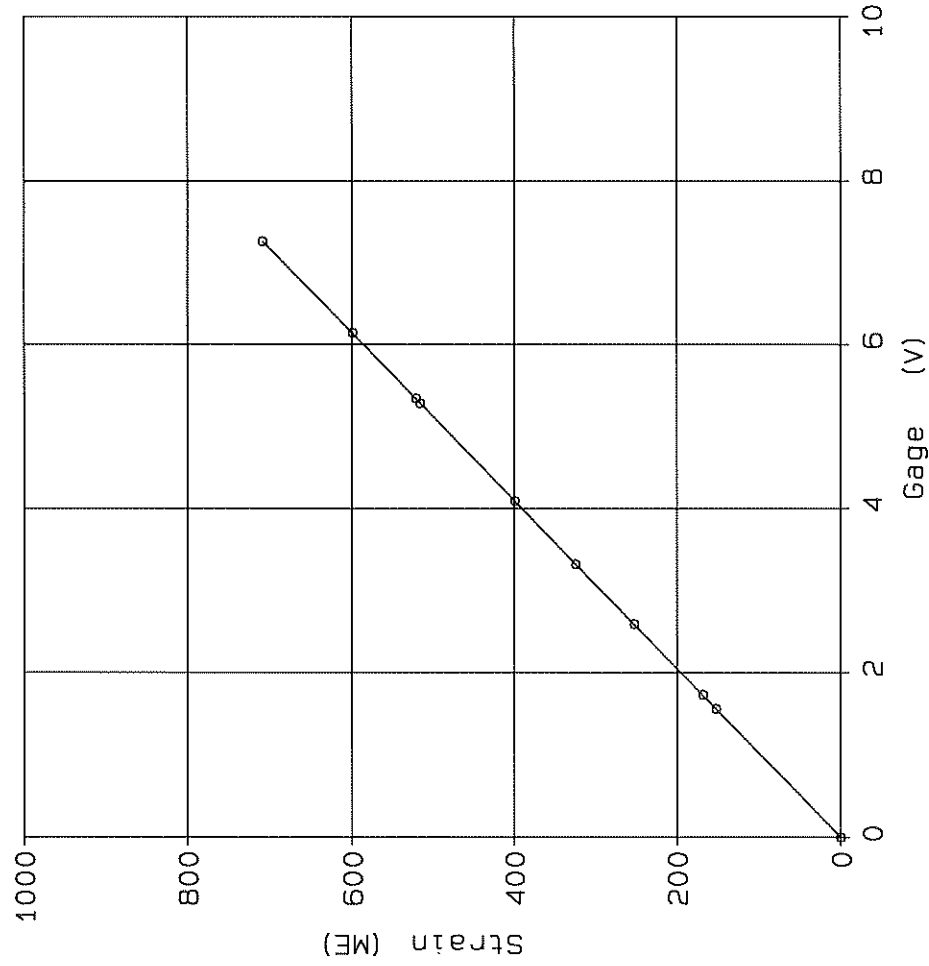

PDA Cal Factor = 97.7 ME/V
 Shunt (60.4KΩ) = 5.0 V
 General Factor = 339.2 ME/mV/V
 Traceable to N.I.S.T.

Strain ME	Gage V
0	.00
153	1.57
152	1.57
169	1.74
252	2.59
324	3.33
400	4.09
516	5.28
521	5.34
600	6.14
709	7.27

Calibrated by: J. D. Dantley
 Calibrated on: 16-Jan-01