


Pile Dynamics Inc Transducer 5128

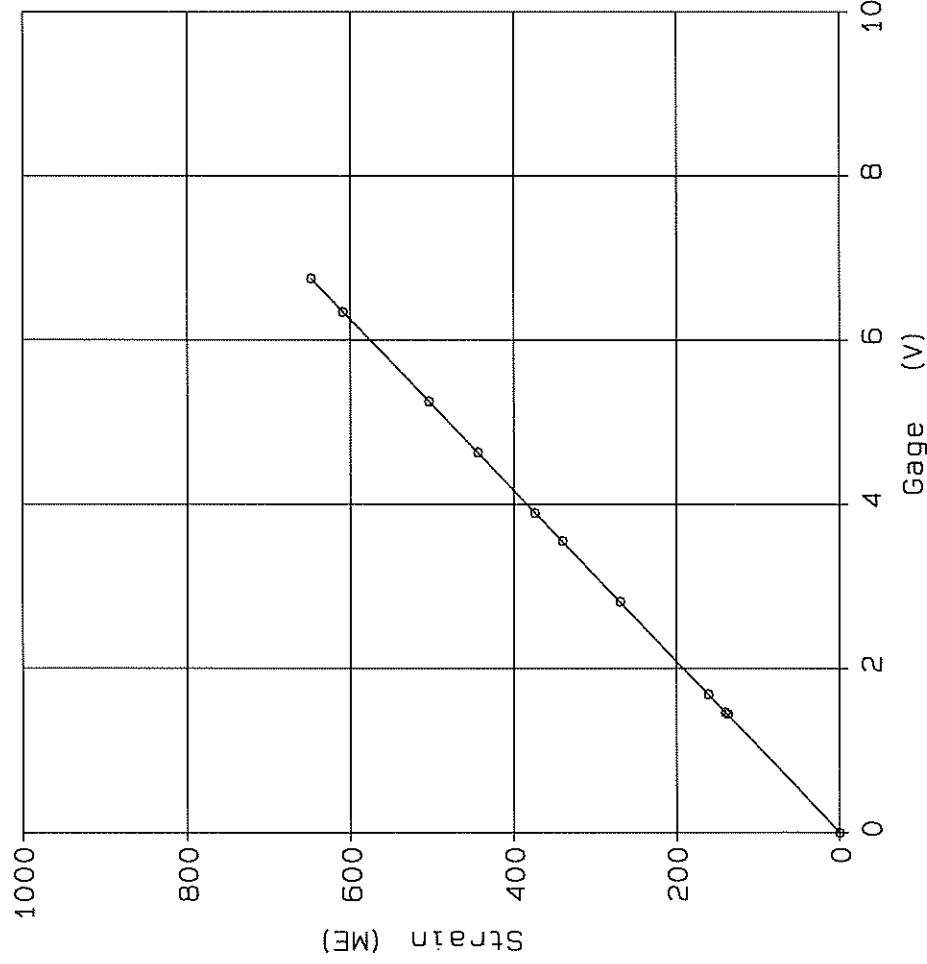

PDA Cal Factor = 96.1 ME/V
 Shunt (60.4KΩ) = 5.0 V
 General Factor = 333.7 ME/mV/V
 Traceable to N.I.S.T.

Strain ME	Gage V
0	.00
140	1.47
138	1.44
161	1.68
270	2.81
341	3.55
374	3.90
445	4.63
505	5.26
609	6.34
649	6.76

Calibrated by: *J. J. Tantauff*
 Calibrated on: 16-Jan-01