


Pile Dynamics Inc Transducer 5129

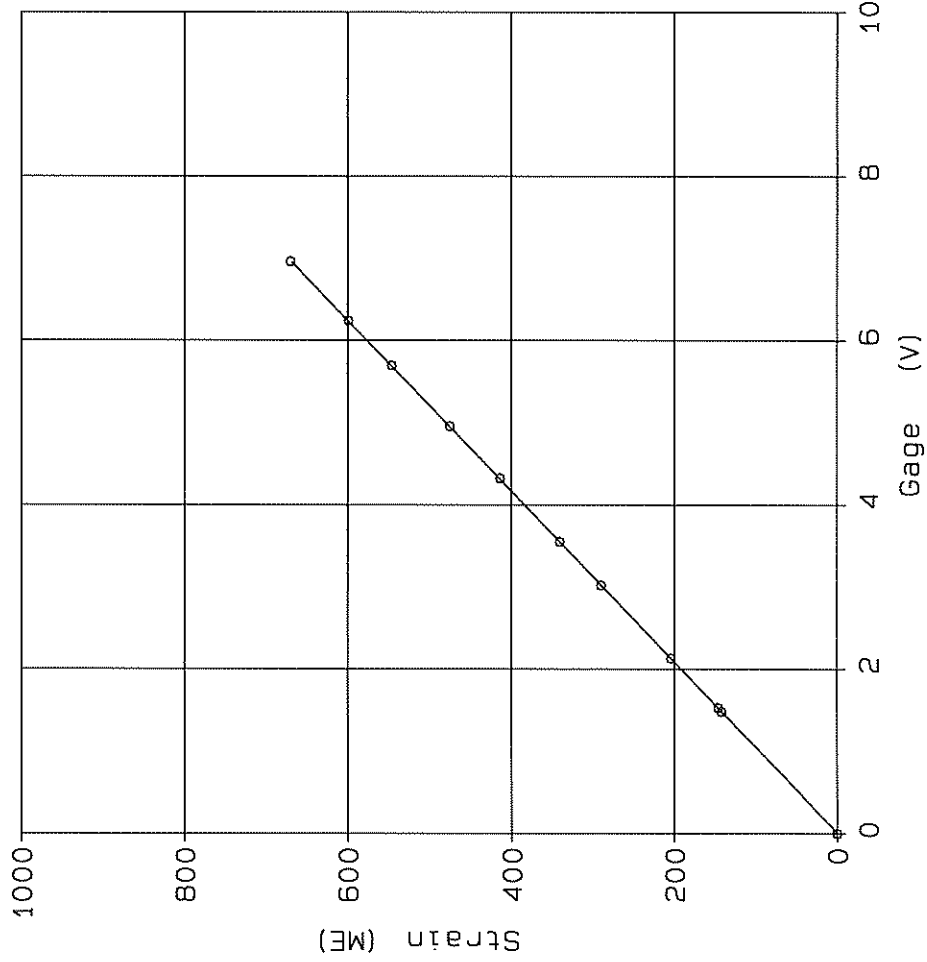

PDA Cal Factor = 96.2 ME/V
 Shunt (60.4KΩ) = 5.0 V
 General Factor = 334.0 ME/mV/V
 Traceable to N.I.S.T.

Strain ME	Gage V
0	.00
142	1.49
146	1.53
204	2.14
290	3.03
341	3.56
415	4.32
475	4.95
546	5.69
600	6.24
670	6.97

Calibrated by: *J. Dentoff*
 Calibrated on: 16-Jan-01