


Pile Dynamics Inc Transducer 5133

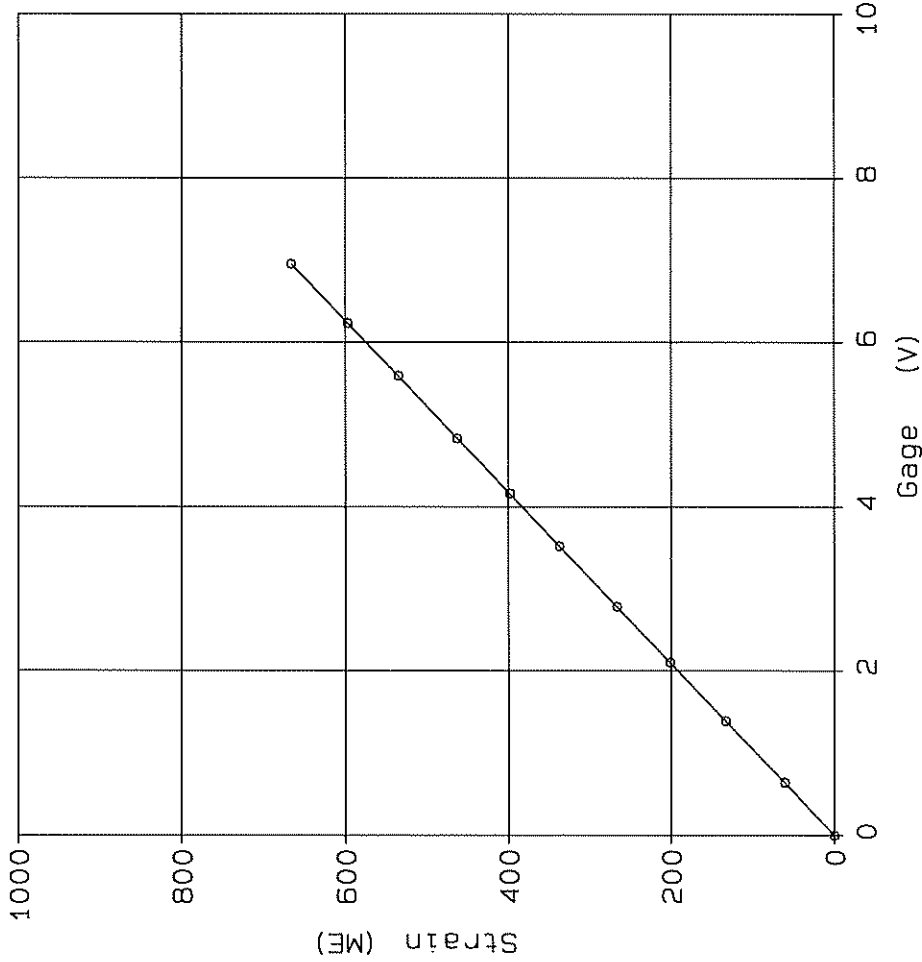

PDA Cal Factor = 95.9 ME/V
 Shunt (60.4KΩ) = 5.0 V
 General Factor = 332.9 ME/mv/V
 Traceable to N.I.S.T.

Strain ME	Gage V
0	.00
62	.65
134	1.40
201	2.10
266	2.78
337	3.52
399	4.16
463	4.84
536	5.59
597	6.23
666	6.95

Calibrated by: Ray Jamb

Calibrated on: 31-Jan-01