


Pile Dynamics Inc Transducer 5149

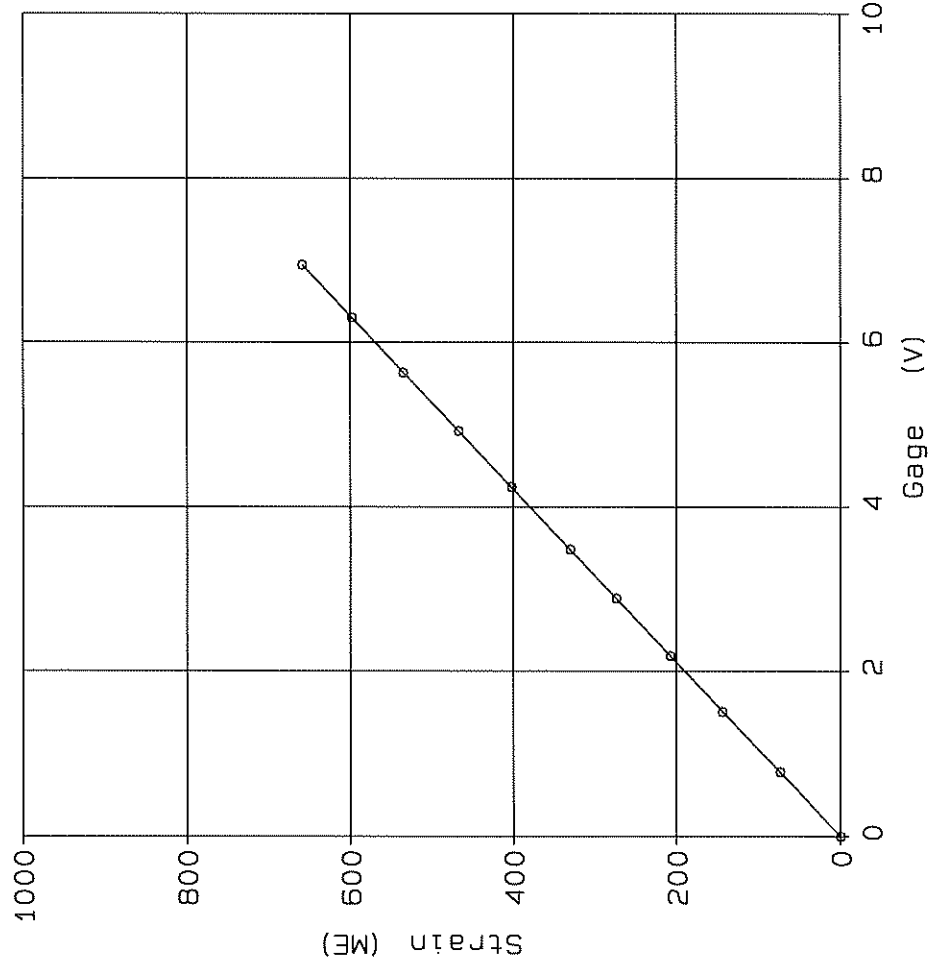

PDA Cal Factor = 95.0 ME/V
 Shunt (60.4KΩ) = 5.0 V
 General Factor = 329.7 ME/mV/V
 Traceable to N.I.S.T.

Strain ME	Gage V
0	.00
75	.79
144	1.52
207	2.18
274	2.89
330	3.48
403	4.24
468	4.93
535	5.64
598	6.30
659	6.94

Calibrated by: Greg Jensen
 Calibrated on: 31-Jan-01