




Pile Dynamics, Inc.

Transducer 5156

Strain ($\mu\epsilon$)

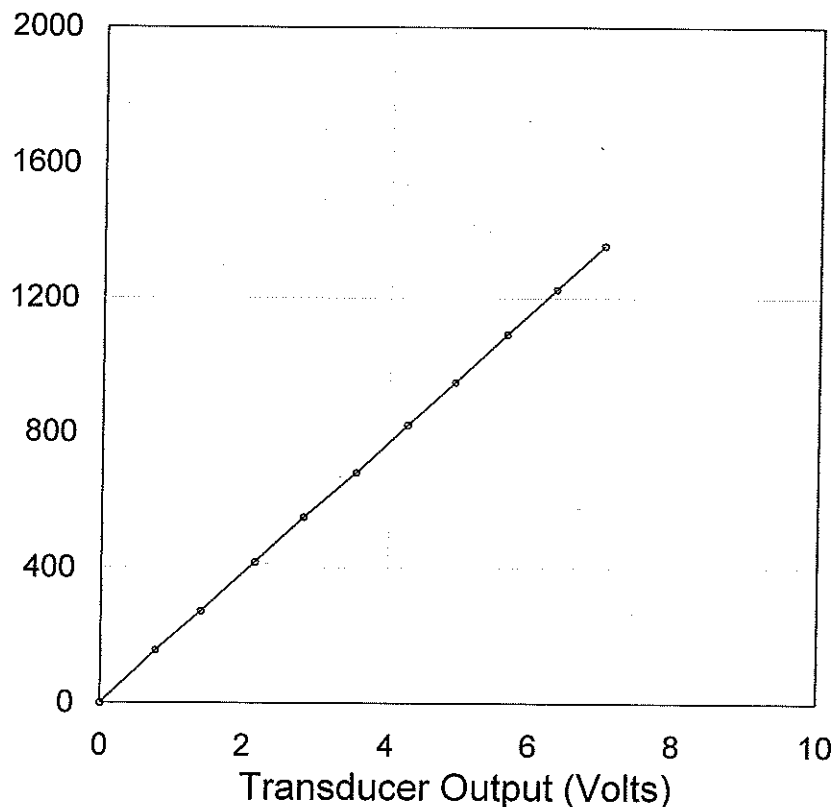

PDA Cal Factor (5.0 V)

96.7 $\mu\epsilon/V$

Applied Strain ($\mu\epsilon$)	Transducer Output (Volts)
0	0.00
157	0.77
273	1.40
417	2.15
548	2.82
682	3.54
820	4.25
949	4.91
1091	5.63
1227	6.32
1356	6.99

Shunt (60.4 K Ω)

2.5 V

General Factor

335.7 $\mu\epsilon/mV/V$

Traceable to N.I.S.T.

Strain Transducer Calibrator System 2011 Version 1.5

Calibrated by:

[Signature]

Calibrated on:

13-May-2013

Smart Sensor? ☒ Yes ☐ No Smart Chip

Programmed by: E.S.

Date: 5-14-13

CRC value 73F5