


Pile Dynamics Inc Transducer 5167

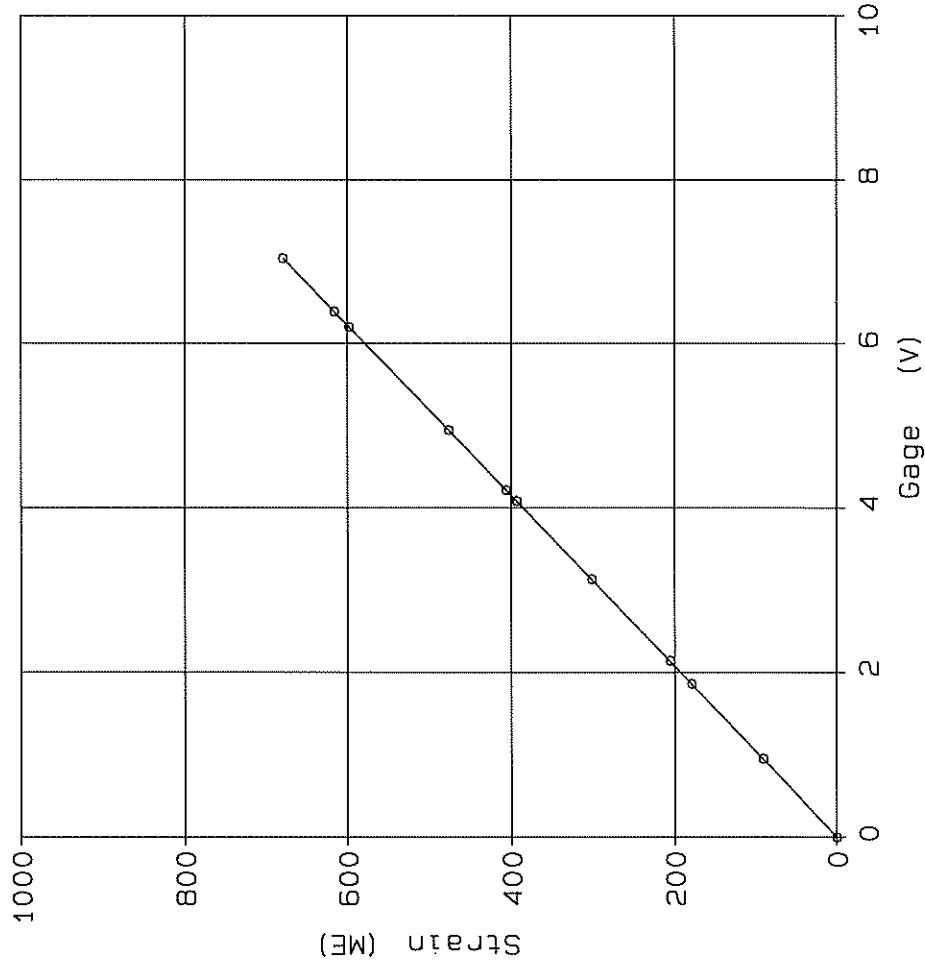

PDA Cal Factor = 96.5 ME/V
 Shunt (60.4KΩ) = 5.0 V
 General Factor = 335.1 ME/mV/V
 Traceable to N.I.S.T.

Strain ME	Gage V
0	.00
91	.95
179	1.87
206	2.14
301	3.13
393	4.08
406	4.22
477	4.95
598	6.20
616	6.40
680	7.05

Calibrated by: J. Dentally

Calibrated on: 26-Jan-01