


Pile Dynamics Inc Transducer 5192

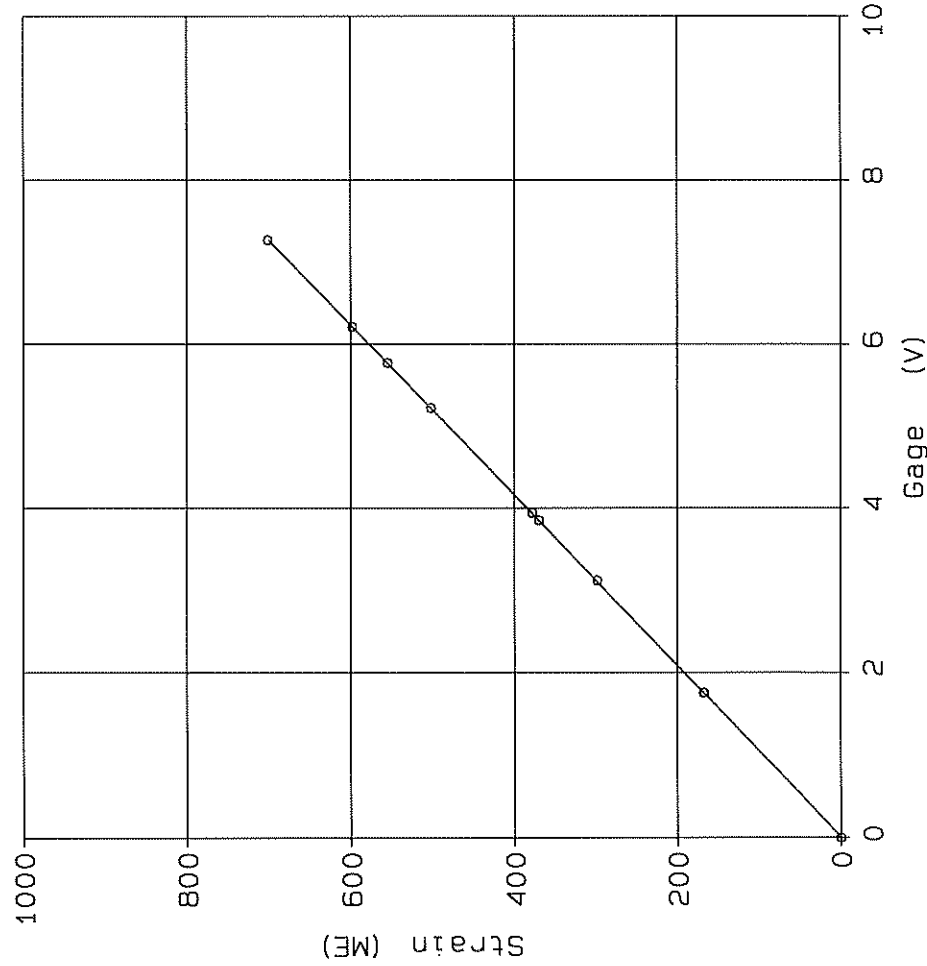

PDA Cal Factor = 96.5 ME/V
 Shunt (60.4KΩ) = 5.0 V

 General Factor = 335.0 ME/mV/V
 Traceable to N.I.S.T.

Strain ME	Gage V
0	.00
167	1.75
168	1.76
168	1.76
299	3.12
370	3.86
378	3.94
503	5.22
555	5.78
599	6.21
701	7.27

Calibrated by: J. Denton
 Calibrated on: 05-Jan-01