


Pile Dynamics, Inc.

Pile Dynamics, Inc.

Transducer A173

Strain ($\mu\epsilon$)

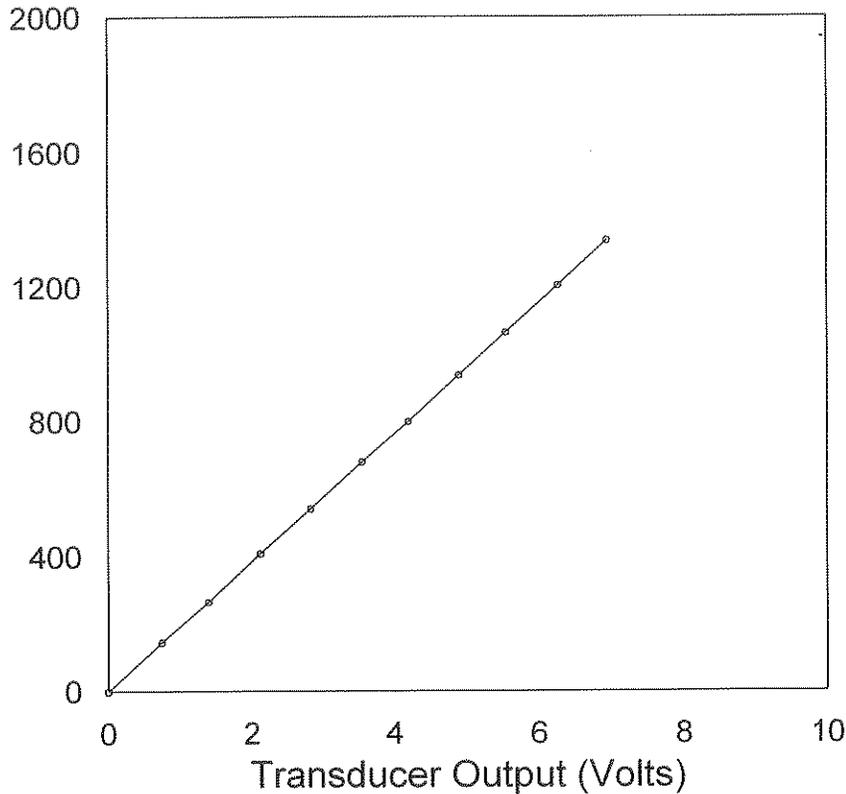

PDA Cal Factor (5.0 V)

96.1 $\mu\epsilon/V$

Applied Strain ($\mu\epsilon$)	Transducer Output (Volts)
0	0.00
146	0.74
266	1.39
408	2.12
541	2.83
679	3.55
798	4.19
935	4.89
1063	5.54
1206	6.26
1338	6.94

Shunt (60.4 K Ω)

2.5 V

General Factor

333.6 $\mu\epsilon/mV/V$

Traceable to N.I.S.T.

Strain Transducer Calibrator System 2011 Version 1.5

Calibrated by: *[Signature]*

Calibrated on:

26-Sep-2013

Smart Sensor? Yes No Smart Chip

Programmed by: E.S.

Date: 9-27-13

CRC value F2CD