


Certificate of Calibration

Pile Dynamics, Inc.

Calibrated by Pile Dynamics, Inc.

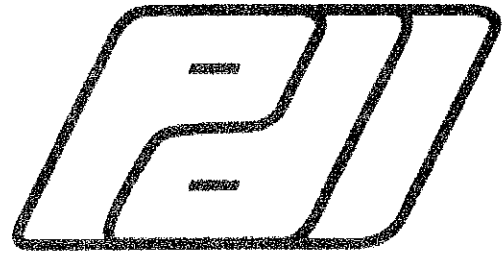

Serial No: 45791 Temperature: 23.0 °C

Model: PE Humidity: 28%

Calibrated on: Channel 4 on 8G 5161 LE

PDA CALIBRATION FACTOR

1148.9 g's/volt

R²: 0.999958 [No chip]

Ref Acc 1: 78268! Cal on: 11Jan2024
986 g's/volt

Ref Acc 2: 78270! Cal on: 11Jan2024
971 g's/volt


Operator: William Johnson

Signed

Reference accelerometer calibrations are traceable to the United States National Institute of Standards and Technology (NIST).

Calibration valid 2 years

From: 14Nov2025

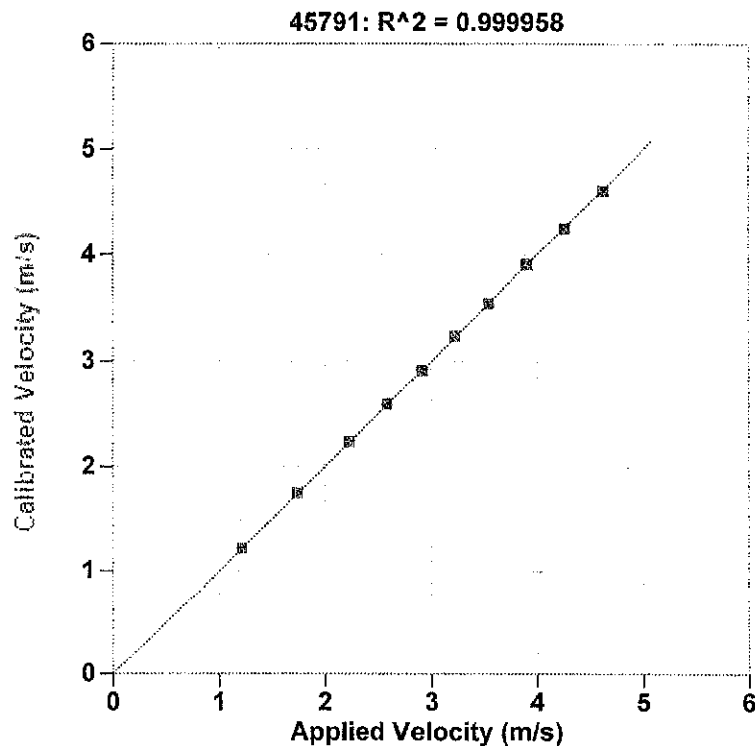

Reference Velocity	S/N 45791 Velocity
m/s	m/s
1.225	1.222
1.750	1.753
2.240	2.244
2.599	2.599
2.919	2.916
3.227	3.240
3.545	3.548
3.909	3.917
4.262	4.252
4.626	4.617
Maximum Acceleration: 1003 g's	