


Certificate of Calibration

Pile Dynamics, Inc.

Calibrated by Pile Dynamics, Inc.

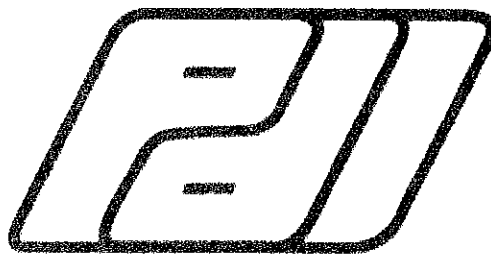

Serial No: 63876 Temperature: 22.3 °C

Model: PE Humidity: 28%

Calibrated on: Channel 4 on 8G 5161 LE

PDA CALIBRATION FACTOR

1049.4 g's/volt

R²: 0.999978 [No chip]

Ref Acc 1: 78268! Cal on: 11Jan2024
986 g's/volt

Ref Acc 2: 78270! Cal on: 11Jan2024
971 g's/volt


Operator: William Johnson

Signed

Reference accelerometer calibrations are traceable to the United States National Institute of Standards and Technology (NIST).

Calibration valid 2 years

From: 14Nov2025

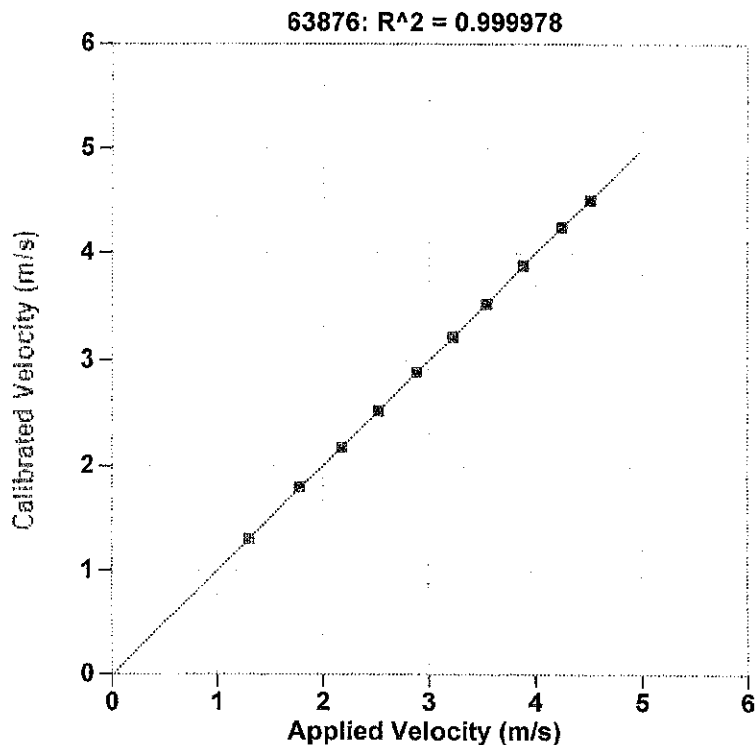

Reference Velocity	S/N 63876 Velocity
m/s	m/s
1.306	1.311
1.794	1.805
2.184	2.181
2.523	2.527
2.894	2.895
3.225	3.229
3.541	3.535
3.890	3.891
4.253	4.252
4.523	4.519
Maximum Acceleration: 979 g's	