




Pile Dynamics, Inc.

Transducer C085

Strain ($\mu\epsilon$)

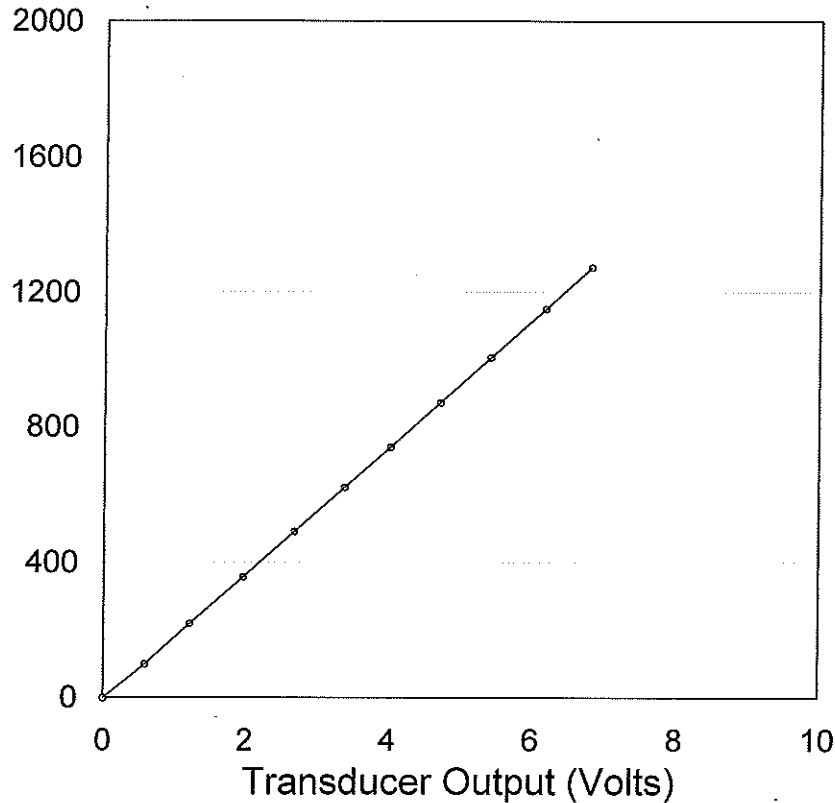

PDA Cal Factor (5.0 V)

93.7 $\mu\epsilon/V$

Applied Strain ($\mu\epsilon$)	Transducer Output (Volts)
0	0.00
100	0.57
219	1.21
356	1.96
490	2.68
620	3.38
738	4.02
872	4.70
1005	5.41
1151	6.17
1274	6.81

Shunt (60.4 K Ω)

2.5 V

General Factor

325.2 $\mu\epsilon/mV/V$

Traceable to N.I.S.T.

Strain Transducer Calibrator System 2011 Version 1.5

Calibrated by:

E. S. Smith

Calibrated on:

04-Jun-2013

Smart Sensor? Yes No Smart Chip

Programmed by: E.S. Date: 6-4-13 CRC value 02B6