




Pile Dynamics, Inc.

Transducer C116

Strain ($\mu\epsilon$)

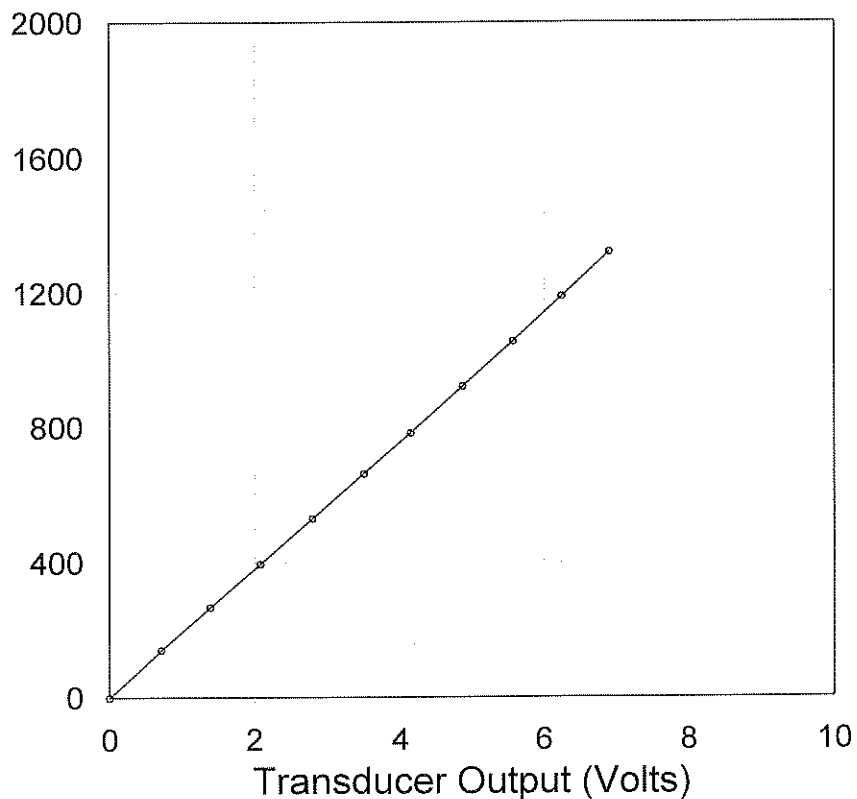

PDA Cal Factor (5.0 V)

95.2 $\mu\epsilon/V$

Applied Strain ($\mu\epsilon$)	Transducer Output (Volts)
0	0.00
142	0.72
268	1.39
395	2.08
529	2.79
661	3.49
782	4.14
921	4.86
1056	5.56
1190	6.24
1321	6.89

Shunt (60.4 K Ω)

2.5 V

General Factor

330.6 $\mu\epsilon/mV/V$

Traceable to N.I.S.T.

Calibrated by: Kurtz Antin

Calibrated on:

06-Mar-2012