




# Certificate of Calibration

Pile Dynamics, Inc.  
 Transducer Model: PDI Strain Transducer  
 Serial Number: S492  
 PDI Gage Factor: 140.9  
 Mean Linear Correlation Coefficient: 0.999954

Table 1: Representative Calibration Data

| Applied strain ( $\mu\text{E}$ ) | Gage Output (mV/Vexc) | Applied strain ( $\mu\text{E}$ ) | Gage Output (mV/Vexc) |
|----------------------------------|-----------------------|----------------------------------|-----------------------|
| -2099.7                          | -4.303                | 643.0                            | 1.360                 |
| -1528.9                          | -3.112                | 1010.5                           | 2.126                 |
| -1030.2                          | -2.091                | 1386.7                           | 2.869                 |
| -695.5                           | -1.392                | 1771.7                           | 3.630                 |
| -262.5                           | -0.495                | 1996.9                           | 4.098                 |
| 210.0                            | 0.471                 |                                  |                       |

Calibration Curve

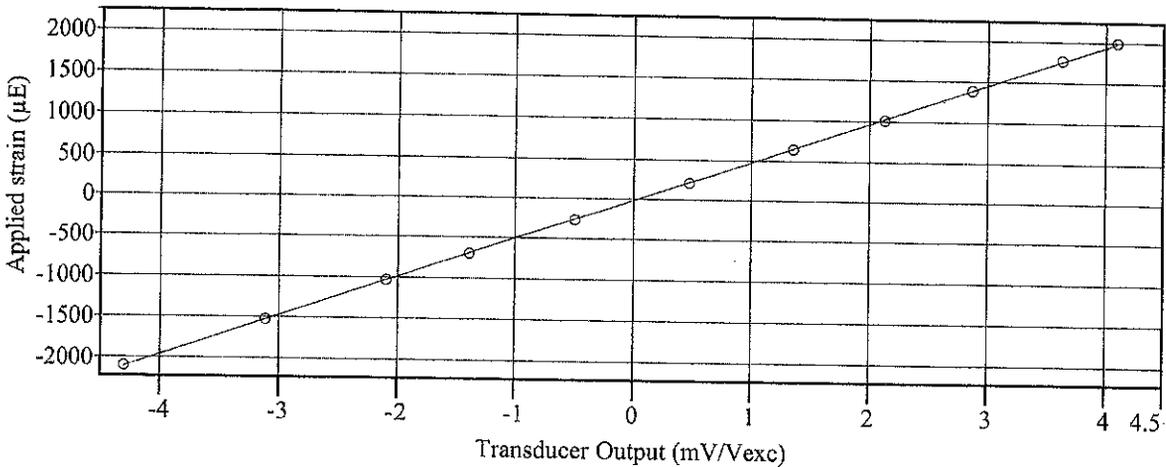

PDI Strain Transducer Calibration System (PDI STCS)

PDI STCS Serial Number: 1000HA  
 Firmware version number: 0.9.0.0  
 Transducer Gage Length: 3 inches (76.2mm)  
 Excitation Voltage for Calibration: 5.0 VDC

PDI certifies the above STCS instrument meets or exceeds published specifications and has been verified using standards and instruments whose accuracies are traceable to the National Institute of Standards and Technology (NIST), an accepted value of a natural physical constant or a ratio calibration technique.

Calibrated By: Paul Hartman

Signature: Paul Hartman

PDI Gage: S492

Calibration Date: 12/8/2025 1:27:23 PM

