




# Pile Dynamics, Inc.

## Transducer E755

Strain ( $\mu\epsilon$ )

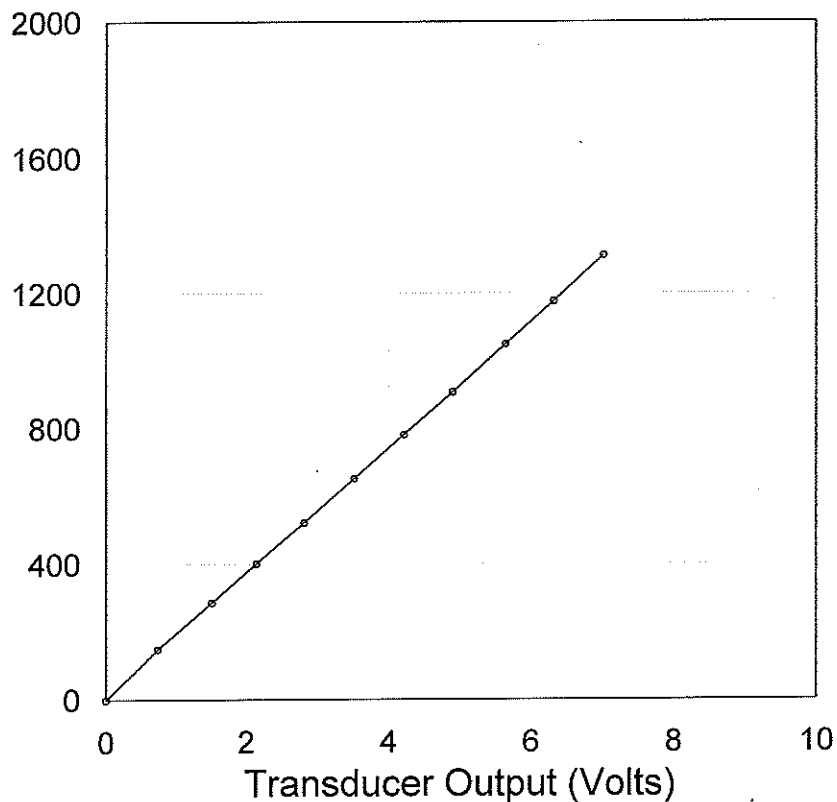

PDA Cal Factor (5.0 V)

92.9 $\mu\epsilon/V$

Applied Strain ( $\mu\epsilon$ )	Transducer Output (Volts)
0	0.00
151	0.74
286	1.51
402	2.14
520	2.81
651	3.51
780	4.21
907	4.89
1048	5.63
1176	6.30
1312	7.01

Shunt (60.4 K $\Omega$ )

2.5 V

General Factor

322.4 $\mu\epsilon/mV/V$

Traceable to N.I.S.T.

Strain Transducer Calibrator System 2011 Version 1.5

Calibrated by:

*Ernie S. Searles*

Calibrated on:

11-Jun-2013

Smart Sensor?  Yes  No Smart Chip

Programmed by: E.S. Date: 6-12-13 CRC value 60DF