




Pile Dynamics, Inc.

Transducer E774

Strain ($\mu\epsilon$)

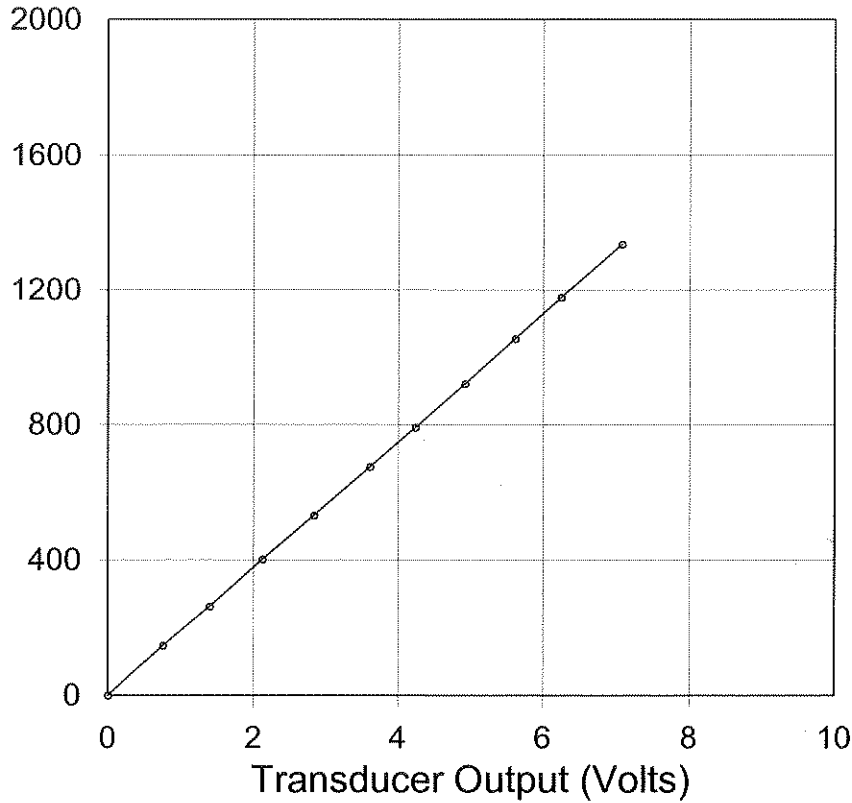

PDA Cal Factor (5.0 V)

94.1 $\mu\epsilon/V$

Applied Strain ($\mu\epsilon$)	Transducer Output (Volts)
0	0.00
147	0.75
262	1.39
400	2.12
532	2.83
674	3.60
792	4.23
921	4.92
1054	5.61
1178	6.24
1337	7.07

Shunt (60.4 K Ω)

2.5 V

General Factor

326.7 $\mu\epsilon/mV/V$

Traceable to N.I.S.T.

Strain Transducer Calibrator System 2009 Version 1.3

Calibrated by: *VT*

Calibrated on: 28-Jun-2010

Smart Sensor? yes no Smart Chip programmed by: VT on: 6-28-10 CRC value: E3D4