




Pile Dynamics, Inc.

Transducer E784

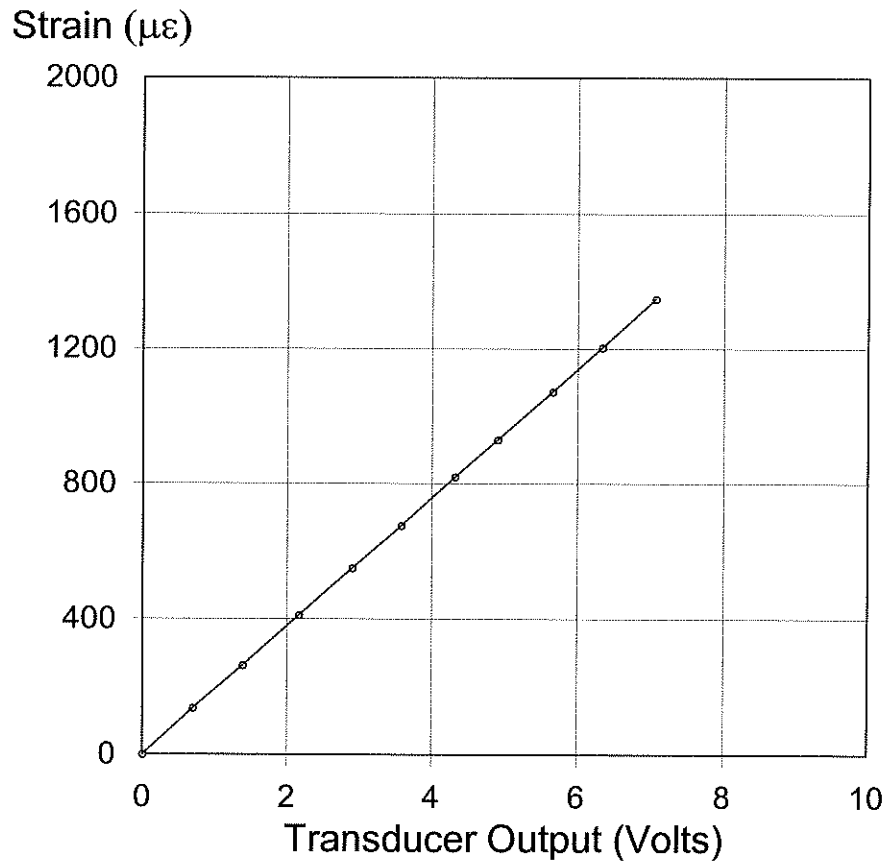


PDA Cal Factor (5.0 V) 95.0 $\mu\epsilon/V$

Applied Strain ($\mu\epsilon$)	Transducer Output (Volts)
0	0.00
138	0.69
262	1.38
410	2.16
548	2.90
674	3.57
819	4.31
930	4.90
1072	5.65
1204	6.33
1349	7.06

Shunt (60.4 K Ω) 2.5 V
 General Factor 330.0 $\mu\epsilon/mV/V$

Traceable to N.I.S.T.

Strain Transducer Calibrator System 2009 Version 1.3

Calibrated by: 
 Calibrated on: 02-Mar-2010