




Pile Dynamics, Inc.

Transducer E785

Strain ($\mu\epsilon$)

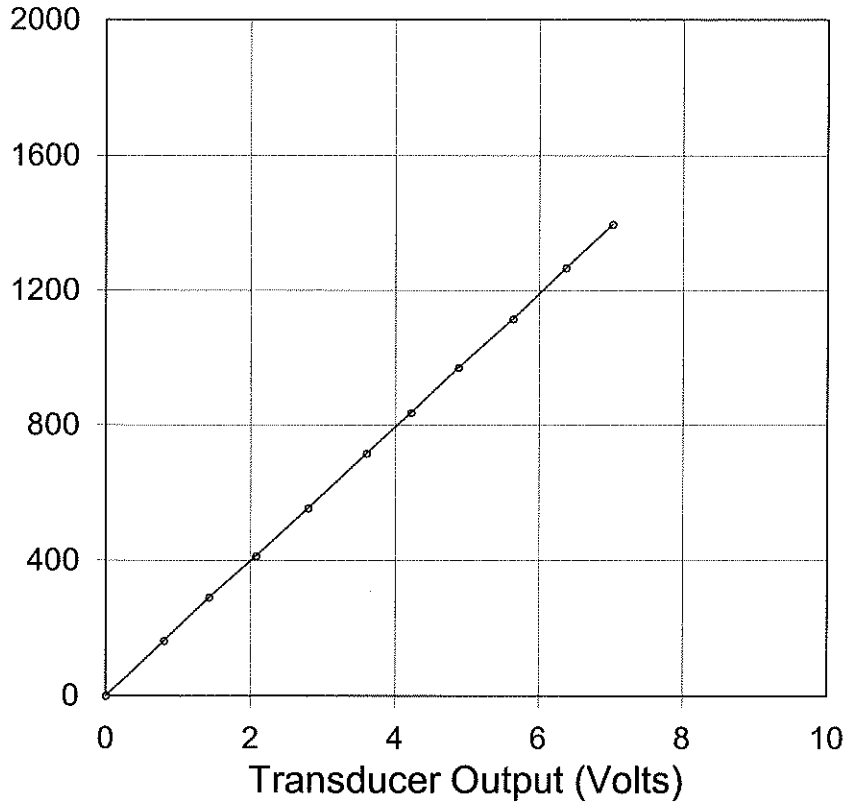

PDA Cal Factor (5.0 V)

99.0 $\mu\epsilon/V$

Applied Strain ($\mu\epsilon$)	Transducer Output (Volts)
0	0.00
164	0.79
292	1.42
413	2.07
552	2.79
714	3.59
838	4.21
970	4.87
1116	5.63
1267	6.37
1397	7.02

Shunt (60.4 K Ω)

2.5 V

General Factor

343.8 $\mu\epsilon/mV/V$

Traceable to N.I.S.T.

Strain Transducer Calibrator System 2009 Version 1.3

Calibrated by:

Calibrated on:

18-May-2010