


# Pile Dynamics, Inc.

## Transducer E988

Strain ( $\mu\epsilon$ )

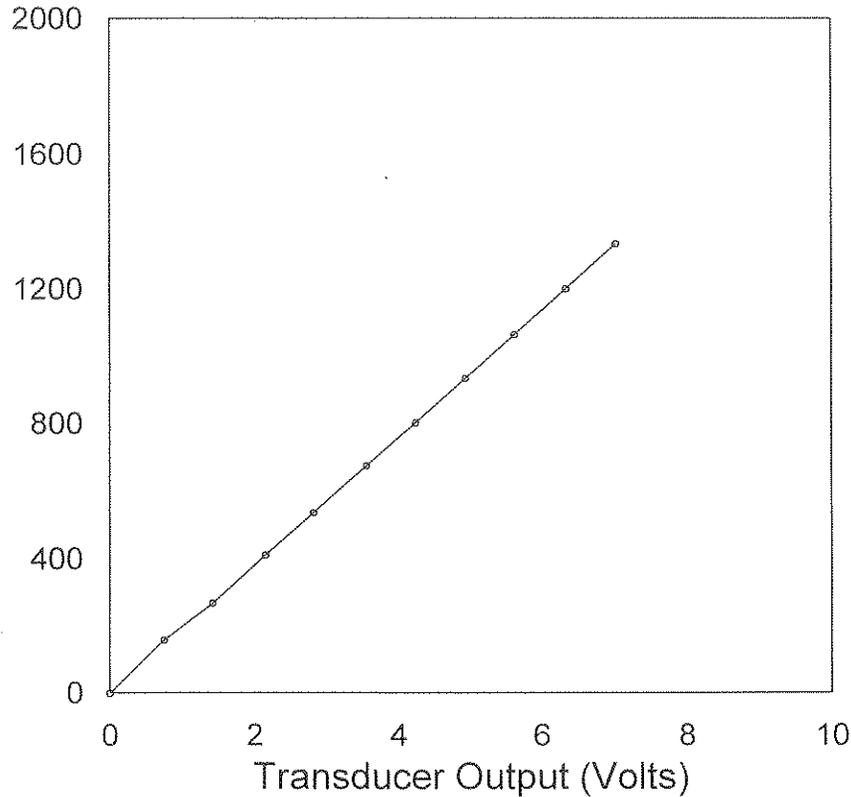

PDA Cal Factor (5.0 V)

94.5 $\mu\epsilon/V$

Applied Strain ( $\mu\epsilon$ )	Transducer Output (Volts)
0	0.00
159	0.75
267	1.41
410	2.15
535	2.81
673	3.54
802	4.22
935	4.93
1064	5.62
1201	6.33
1335	7.02

Shunt (60.4 K $\Omega$ )

2.5 V

General Factor

328.0 $\mu\epsilon/mV/V$

Traceable to N.I.S.T.

Calibrated by: 

Calibrated on:

09-Nov-2013

Strain Transducer Calibrator System 2011 Version 1.5

Smart Sensor?  Yes  No Smart Chip

Programmed by: E.S. Date: 11-9-13 CRC value 1504