




Pile Dynamics, Inc.

Transducer G536

Strain ($\mu\epsilon$)

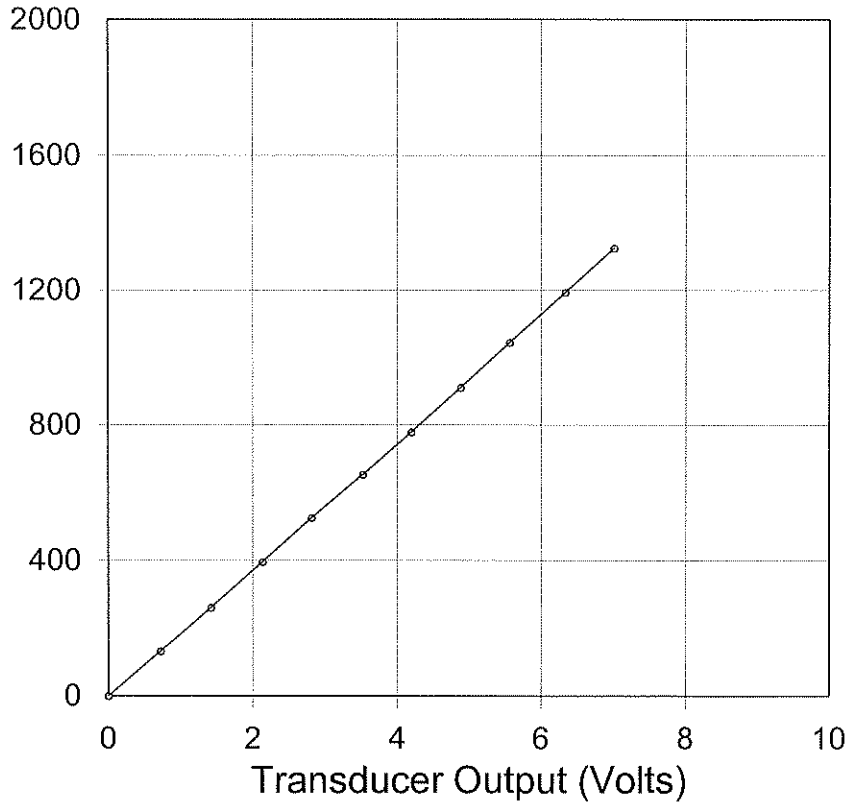

PDA Cal Factor (5.0 V)

94.4 $\mu\epsilon/V$

Applied Strain ($\mu\epsilon$)	Transducer Output (Volts)
0	0.00
132	0.70
260	1.41
394	2.13
524	2.81
652	3.52
777	4.19
910	4.88
1044	5.56
1195	6.33
1327	7.01

Shunt (60.4 K Ω)

2.5 V

General Factor

327.9 $\mu\epsilon/mV/V$

Traceable to N.I.S.T.

Calibrated by:

Calibrated on:

14-Apr-2011