




# Pile Dynamics, Inc.

## Transducer G539

Strain ( $\mu\epsilon$ )

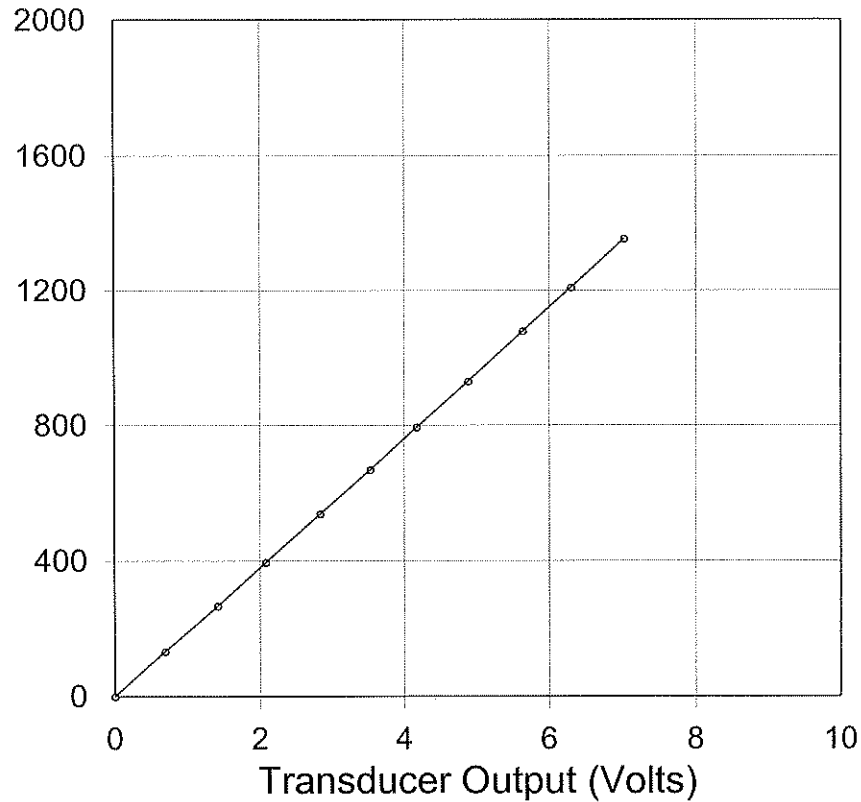

PDA Cal Factor (5.0 V)

96.2 $\mu\epsilon/V$

Applied Strain ( $\mu\epsilon$ )	Transducer Output (Volts)
0	0.00
132	0.69
267	1.41
394	2.08
538	2.83
668	3.52
793	4.17
930	4.88
1078	5.63
1208	6.29
1354	7.02

Shunt (60.4 K $\Omega$ )

2.5 V

General Factor

334.0 $\mu\epsilon/mV/V$

Traceable to N.I.S.T.

Calibrated by:

Calibrated on:

14-Apr-2011