




# Pile Dynamics, Inc.

## Transducer G545

Strain ( $\mu\epsilon$ )

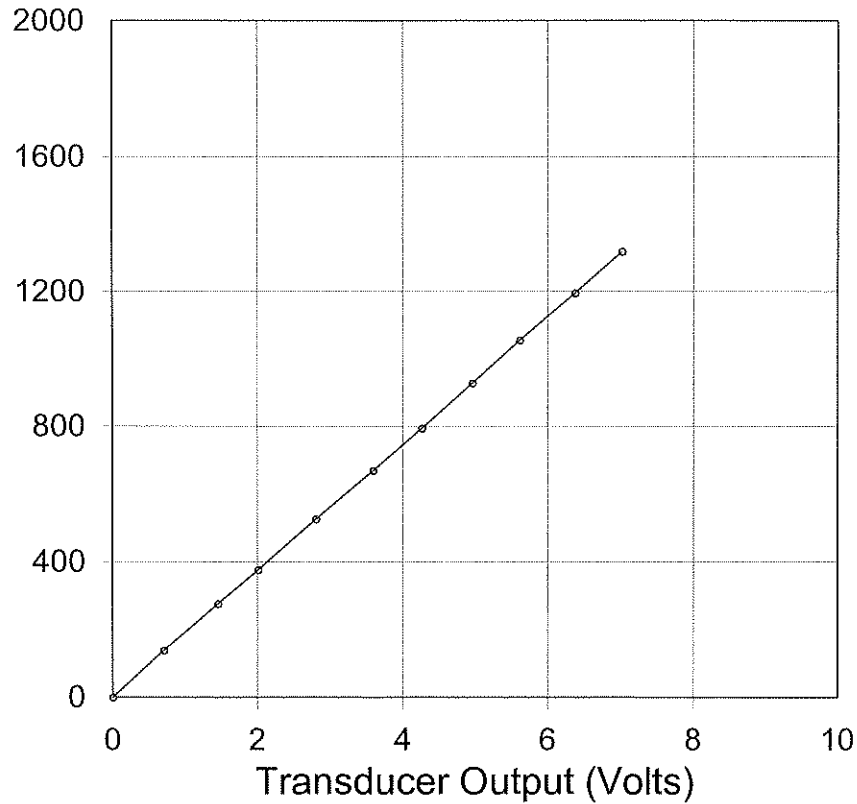

PDA Cal Factor (5.0 V)

93.7  $\mu\epsilon/V$

Applied Strain ( $\mu\epsilon$ )	Transducer Output (Volts)
0	0.00
139	0.70
276	1.45
376	2.01
524	2.81
668	3.59
793	4.26
928	4.96
1055	5.61
1197	6.37
1320	7.02

Shunt (60.4 K $\Omega$ )

2.5 V

General Factor

325.3  $\mu\epsilon/mV/V$

Traceable to N.I.S.T.

Calibrated by:

Calibrated on:

15-Apr-2011