




Pile Dynamics, Inc.

Transducer G546

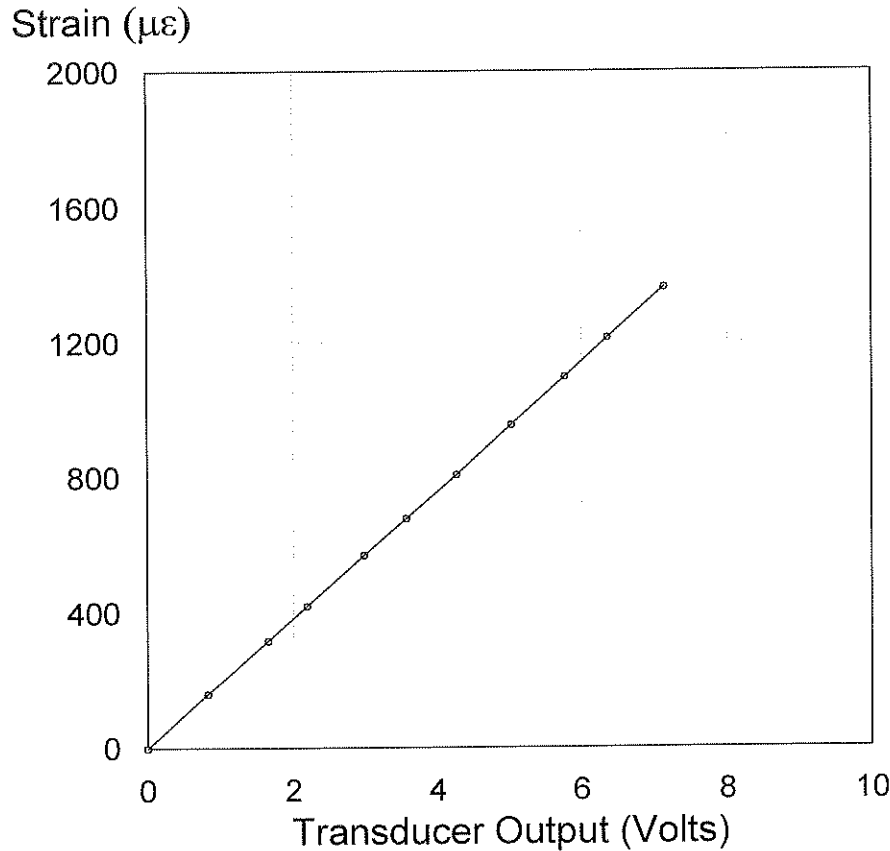


PDA Cal Factor (5.0 V) 95.0 $\mu\epsilon/V$

Applied Strain ($\mu\epsilon$)	Transducer Output (Volts)
0	0.00
160	0.82
318	1.65
419	2.19
568	2.98
676	3.57
806	4.28
954	5.03
1096	5.77
1214	6.36
1363	7.14

Shunt (60.4 K Ω) 2.5 V
 General Factor 330.0 $\mu\epsilon/mV/V$

Traceable to N.I.S.T.

Strain Transducer Calibrator System 2011 Version 1.5

Calibrated by: 
 Calibrated on: 06-Mar-2012