




Pile Dynamics, Inc.

Transducer G548

Strain ($\mu\epsilon$)

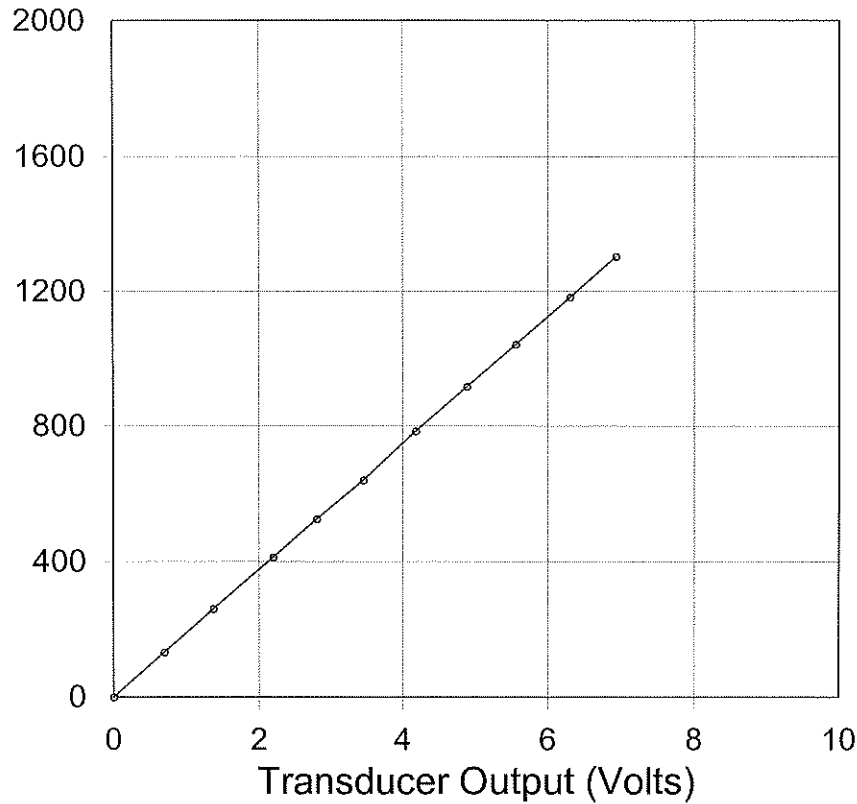

PDA Cal Factor (5.0 V)

93.8 $\mu\epsilon/V$

Applied Strain ($\mu\epsilon$)	Transducer Output (Volts)
0	0.00
132	0.69
260	1.36
413	2.19
524	2.80
641	3.44
784	4.18
916	4.89
1042	5.56
1183	6.30
1304	6.93

Shunt (60.4 K Ω)

2.5 V

General Factor

325.6 $\mu\epsilon/mV/V$

Traceable to N.I.S.T.

Calibrated by:

Calibrated on:

15-Apr-2011