


Pile Dynamics, Inc.

Pile Dynamics, Inc.

Transducer G828

Strain ($\mu\epsilon$)

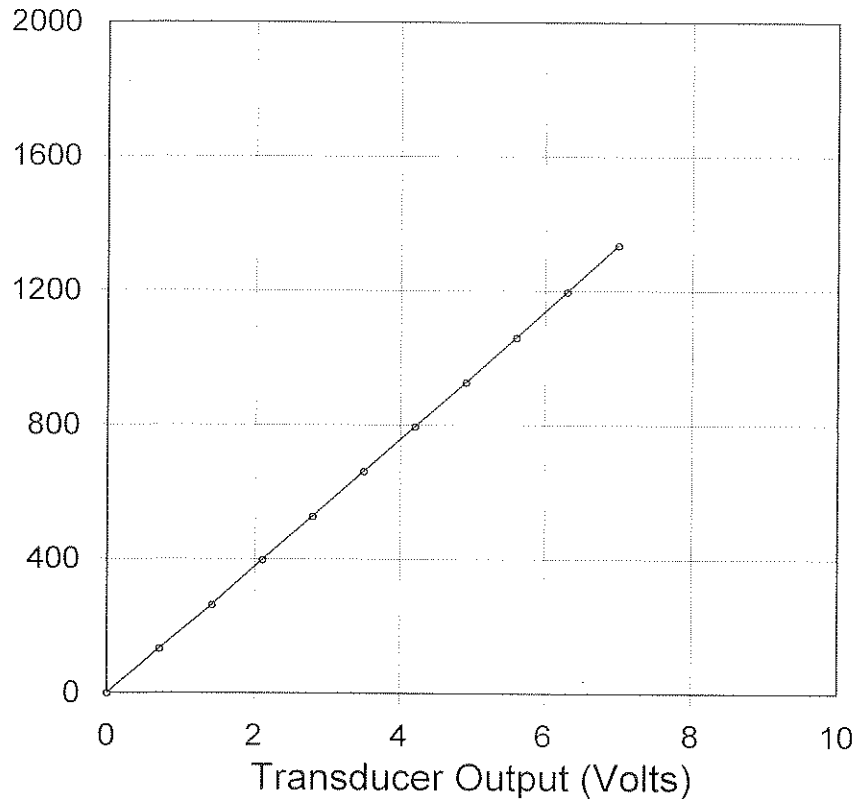

PDA Cal Factor (5.0 V)

95.3 $\mu\epsilon/V$

Applied Strain ($\mu\epsilon$)	Transducer Output (Volts)
0	0.00
134	0.70
263	1.40
397	2.09
527	2.79
661	3.49
794	4.20
928	4.90
1062	5.60
1199	6.30
1337	7.00

Shunt (60.4 K Ω)

2.5 V

General Factor

331.0 $\mu\epsilon/mV/V$

Traceable to N.I.S.T.

Calibrated by:

Kathryn Hutton

Calibrated on:

07-Jul-2011

Strain Transducer Calibrator System 2009 Version 1.3

Smart Sensor? Yes No Smart Chip Programmed by: VW on: 7/7/11 CRC value 5179