




Pile Dynamics, Inc.

Pile Dynamics, Inc.

Transducer

G833

Strain ($\mu\epsilon$)

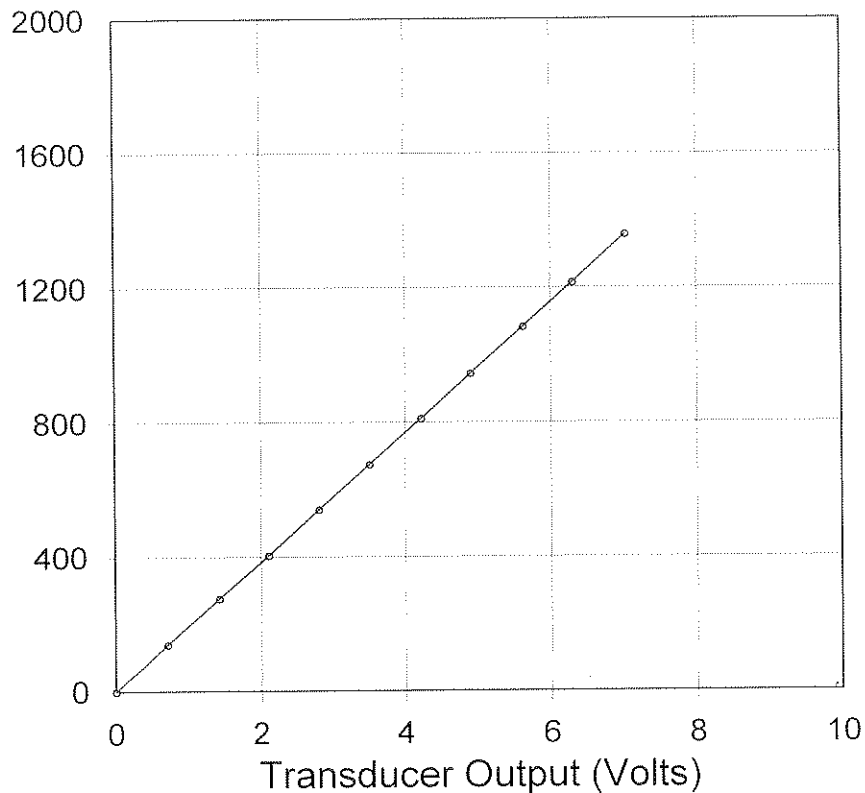

PDA Cal Factor (5.0 V)

96.4 $\mu\epsilon/V$

Applied Strain ($\mu\epsilon$)	Transducer Output (Volts)
0	0.00
139	0.70
275	1.42
404	2.10
541	2.81
675	3.51
811	4.22
945	4.90
1084	5.62
1215	6.30
1359	7.03

Shunt (60.4 K Ω)

2.5 V

General Factor

334.8 $\mu\epsilon/mV/V$

Traceable to N.I.S.T.

Calibrated by:

Karlton Holtan

Calibrated on:

07-Jul-2011

Strain Transducer Calibrator System 2009 Version 1.3

Smart Sensor? Yes No Smart Chip Programmed by: *KA* on: *7/7/11* CRC value *16B5*