




Pile Dynamics, Inc.

Pile Dynamics, Inc.

Transducer

G838

Strain ($\mu\epsilon$)

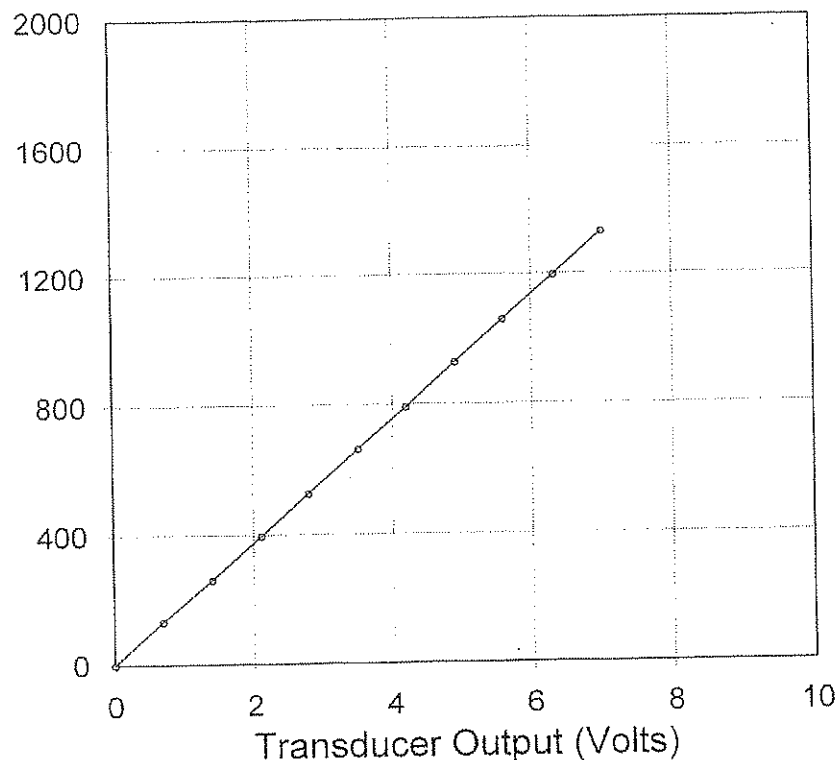

PDA Cal Factor (5.0 V)

95.0 $\mu\epsilon/V$

Applied Strain ($\mu\epsilon$)	Transducer Output (Volts)
0	0.00
133	0.69
262	1.39
398	2.11
527	2.79
663	3.50
791	4.19
930	4.90
1061	5.59
1199	6.31
1332	7.00

Shunt (60.4 K Ω)

2.5 V

General Factor

329.9 $\mu\epsilon/mV/V$

Calibrated by:

Kurtis Hobbie

Calibrated on:

27-Sep-2011

Traceable to N.I.S.T.

Strain Transducer Calibrator System 2009 Version 1.3

Smart Sensor? Yes No Smart Chip Programmed by: YH on: 9/27/11 CRC value 835E