




Pile Dynamics, Inc.

Pile Dynamics, Inc.

Transducer G852

Strain ($\mu\epsilon$)

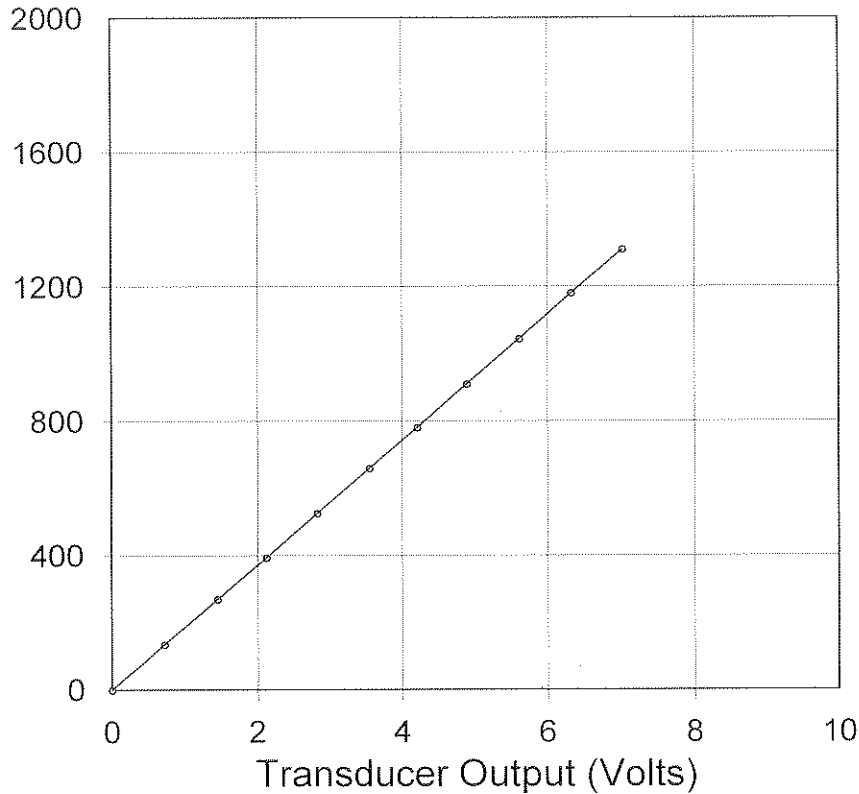

PDA Cal Factor (5.0 V)

93.1 $\mu\epsilon/V$

Applied Strain ($\mu\epsilon$)	Transducer Output (Volts)
0	0.00
136	0.70
269	1.44
393	2.12
525	2.82
658	3.54
780	4.21
911	4.90
1044	5.62
1180	6.32
1311	7.02

Shunt (60.4 K Ω)

2.5 V

General Factor

323.2 $\mu\epsilon/mV/V$

Traceable to N.I.S.T.

Strain Transducer Calibrator System 2009 Version 1.3

Calibrated by: Katherine Hutton

Calibrated on: 05-Jul-2011

Smart Sensor? Yes No Smart Chip Programmed by: ku on: 7/5/11 CRC value 2AC5