




Pile Dynamics, Inc.

Transducer G895

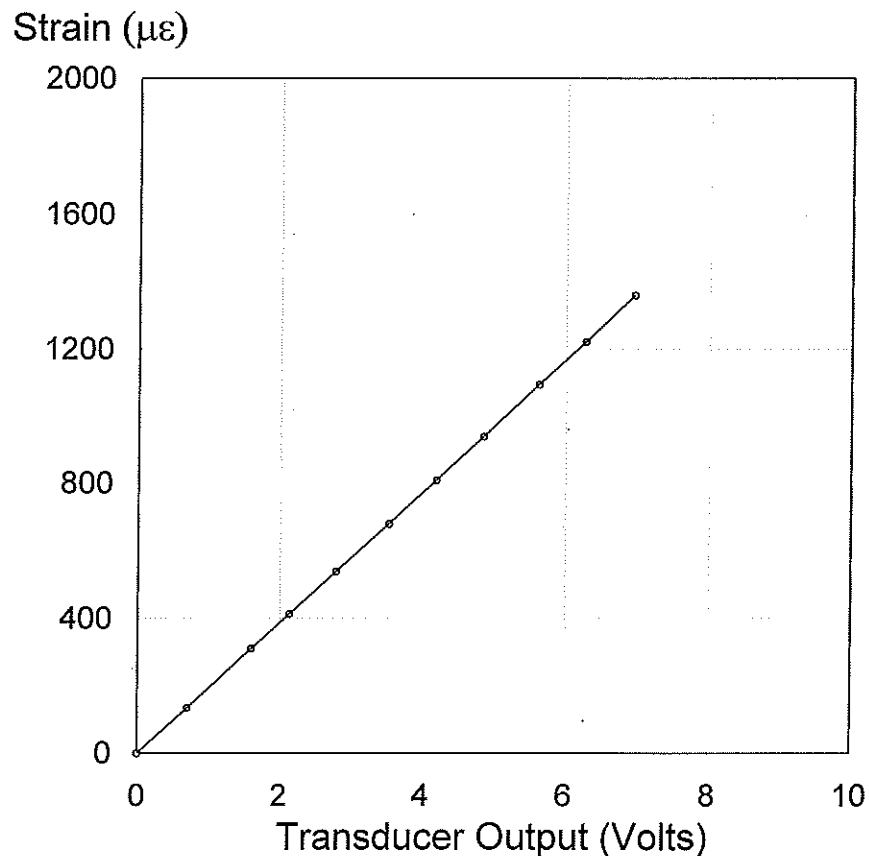

PDA Cal Factor (5.0 V) 97.5 $\mu\epsilon/V$

Applied Strain ($\mu\epsilon$)	Transducer Output (Volts)
0	0.00
136	0.70
311	1.59
411	2.13
537	2.79
679	3.53
809	4.19
938	4.85
1093	5.62
1221	6.27
1360	6.95

Shunt (60.4 K Ω) 2.5 V
 General Factor 338.6 $\mu\epsilon/mV/V$

Traceable to N.I.S.T.

Strain Transducer Calibrator System 2011 Version 1.5

Calibrated by: *Eric Seaford*
 Calibrated on: 11-Jun-2012

Smart Sensor? Yes No Smart Chip

Programmed by: E.S. Date: 6-11-12 CRC value 5E40