




Pile Dynamics, Inc.

Pile Dynamics, Inc.

Transducer G898

Strain ($\mu\epsilon$)

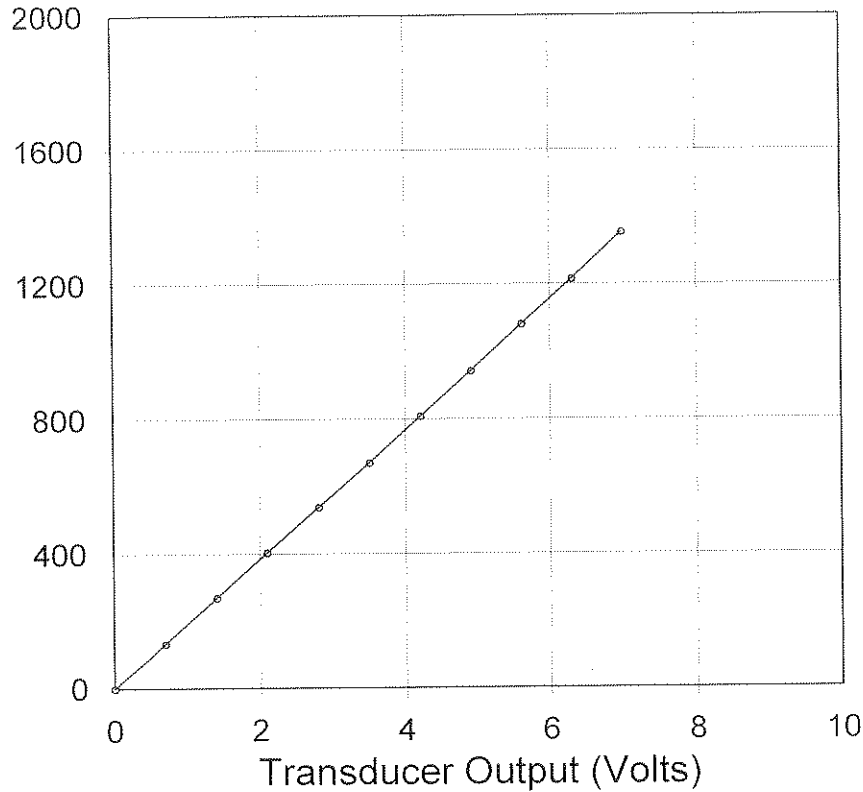

PDA Cal Factor (5.0 V)

96.5 $\mu\epsilon/V$

Applied Strain ($\mu\epsilon$)	Transducer Output (Volts)
0	0.00
134	0.69
270	1.40
404	2.10
538	2.81
670	3.49
809	4.21
943	4.91
1081	5.61
1215	6.31
1354	6.99

Shunt (60.4 K Ω)

2.5 V

General Factor

335.1 $\mu\epsilon/mV/V$

Calibrated by:

Karlus Hutter

Calibrated on:

07-Jul-2011

Traceable to N.I.S.T.

Strain Transducer Calibrator System 2009 Version 1.3

Smart Sensor? Yes No Smart Chip Programmed by: YH on: 7/7/11 CRC value AA21