


Pile Dynamics, Inc.

Pile Dynamics, Inc.

Transducer

H345

Strain ($\mu\epsilon$)

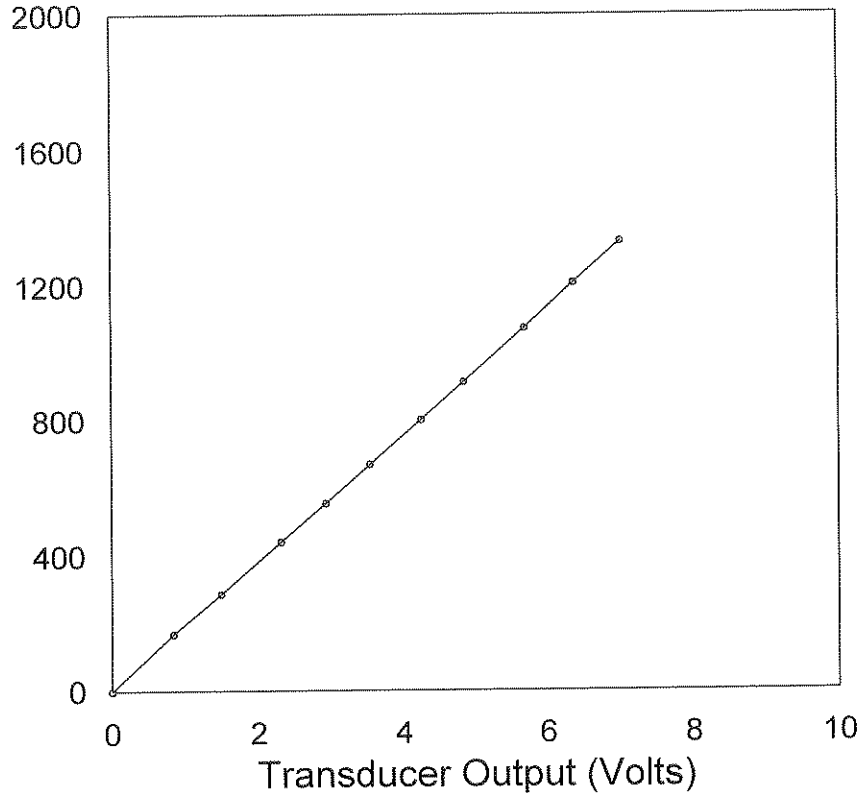

PDA Cal Factor (5.0 V)

94.3 $\mu\epsilon/V$

Applied Strain ($\mu\epsilon$)	Transducer Output (Volts)
0	0.00
170	0.84
288	1.49
440	2.31
554	2.93
668	3.54
800	4.25
911	4.84
1073	5.68
1206	6.36
1330	7.01

Shunt (60.4 K Ω)

2.5 V

General Factor

327.3 $\mu\epsilon/mV/V$

Traceable to N.I.S.T.

Strain Transducer Calibrator System 2011 Version 1.5

Calibrated by: *Uthman*

Calibrated on: 17-Jan-2012

Smart Sensor? Yes No Smart Chip

Programmed by: VT on: 1-17-12 CRC value 94BD