


# Pile Dynamics, Inc.

## Transducer H346

Strain ( $\mu\epsilon$ )

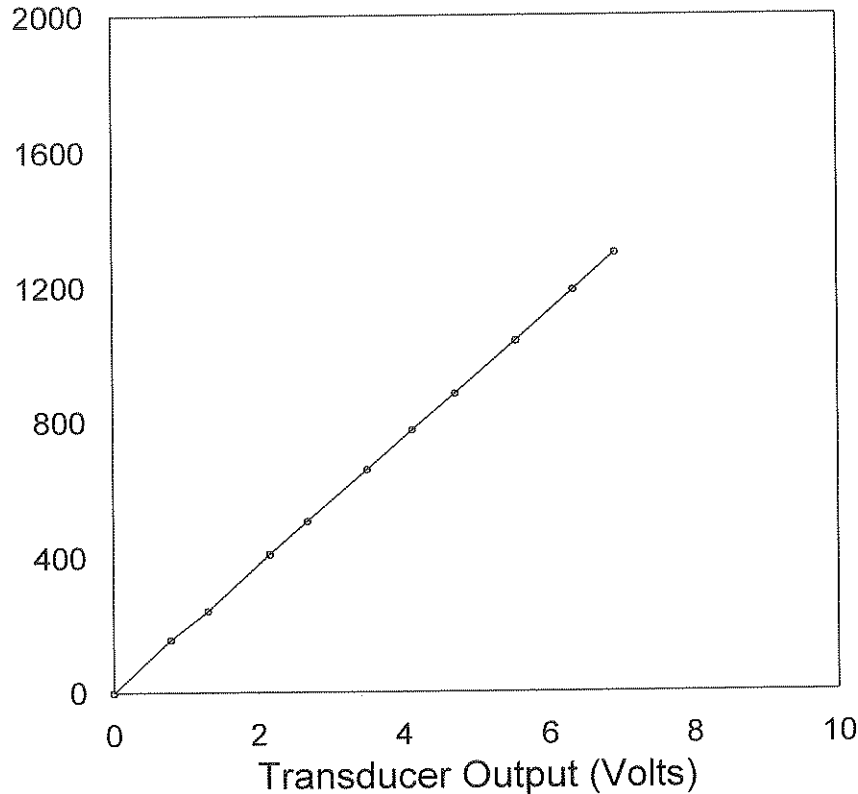

PDA Cal Factor (5.0 V)

93.6 $\mu\epsilon/V$

Applied Strain ( $\mu\epsilon$ )	Transducer Output (Volts)
0	0.00
156	0.79
241	1.29
409	2.16
506	2.68
657	3.50
774	4.13
881	4.71
1038	5.55
1189	6.33
1299	6.91

Shunt (60.4 K $\Omega$ )

2.5 V

General Factor

325.1 $\mu\epsilon/mV/V$

Traceable to N.I.S.T.

Calibrated by: *[Signature]*

Calibrated on: 17-Jan-2012

Strain Transducer Calibrator System 2011 Version 1.5

Smart Sensor?  Yes  No Smart Chip

Programmed by: VT on: 1-17-12 CRC value 1512