




Pile Dynamics, Inc.

Pile Dynamics, Inc. Transducer H349

Strain ($\mu\epsilon$)

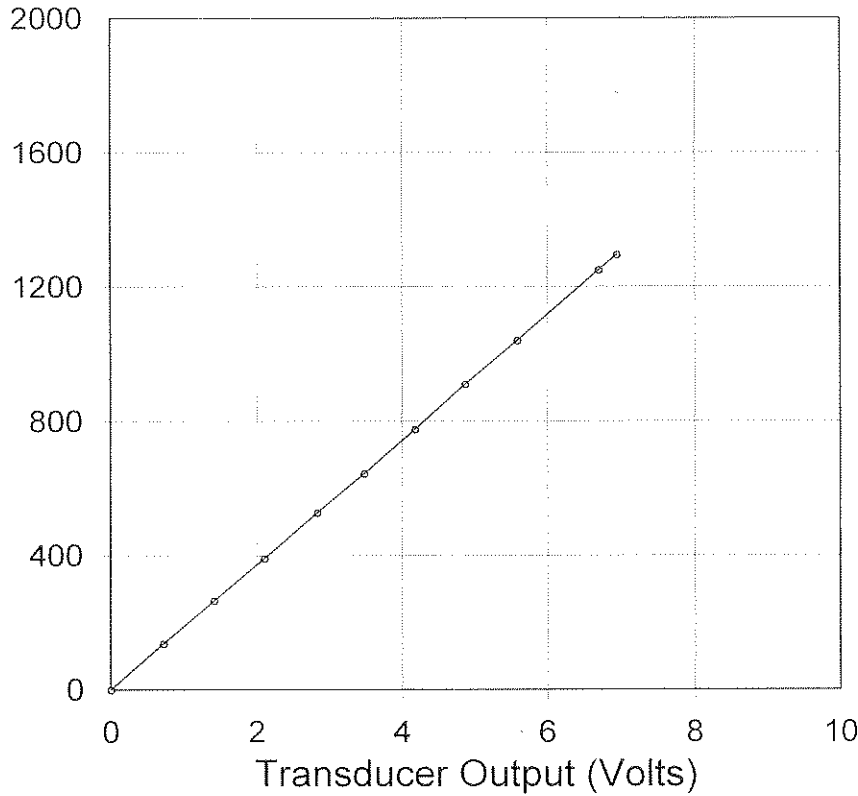

PDA Cal Factor (5.0 V)

93.1 $\mu\epsilon/V$

Applied Strain ($\mu\epsilon$)	Transducer Output (Volts)
0	0.00
137	0.71
265	1.40
391	2.10
527	2.83
644	3.48
776	4.18
909	4.87
1041	5.59
1251	6.69
1295	6.94

Shunt (60.4 K Ω)

2.5 V

General Factor

323.1 $\mu\epsilon/mV/V$

Traceable to N.I.S.T.

Strain Transducer Calibrator System 2011 Version 1.5

Smart Sensor? Yes No Smart Chip

Calibrated by: Jenny Plesulko

Calibrated on: 04-Jan-2012

Programmed by: JP on: 1-4-12 CRC value 29A2