




# Pile Dynamics, Inc.

## Transducer H350

Strain ( $\mu\epsilon$ )

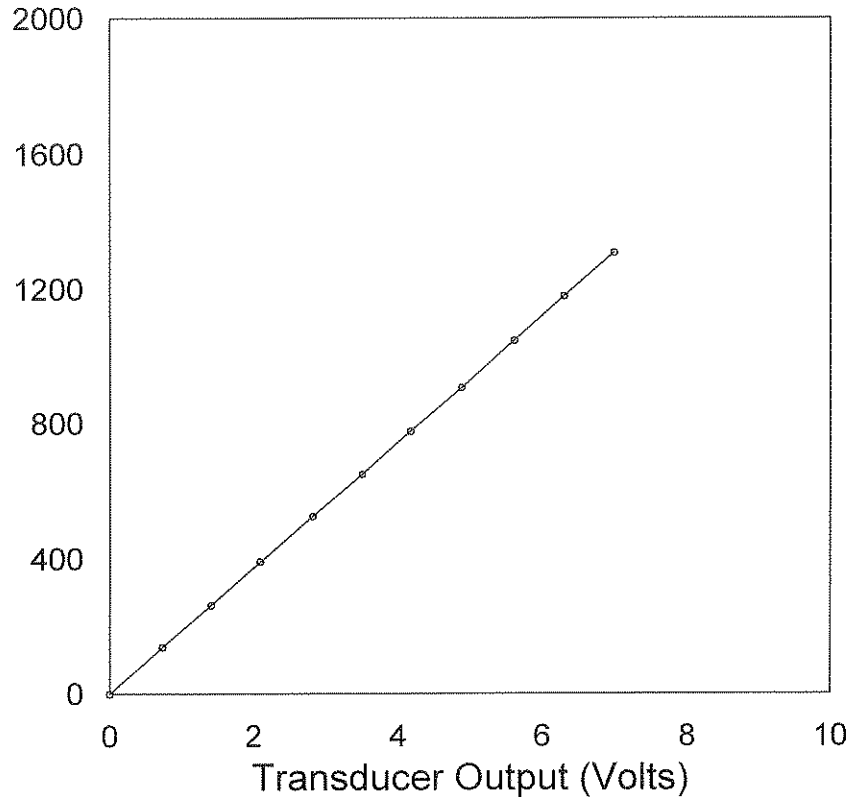

PDA Cal Factor (5.0 V)

93.3 $\mu\epsilon/V$

Applied Strain ( $\mu\epsilon$ )	Transducer Output (Volts)
0	0.00
139	0.72
263	1.40
390	2.09
524	2.82
649	3.50
776	4.17
906	4.88
1047	5.61
1178	6.30
1308	6.98

Shunt (60.4 K $\Omega$ )

2.5 V

General Factor

323.8 $\mu\epsilon/mV/V$

Traceable to N.I.S.T.

Strain Transducer Calibrator System 2009 Version 1.3

Calibrated by: Kathleen Anthony

Calibrated on: 05-Dec-2011

Smart Sensor?  Yes  No Smart Chip

Programmed by: YH on: 12/5/11 CRC value 9EE4