




Pile Dynamics, Inc.

Transducer 1995

Strain ($\mu\epsilon$)

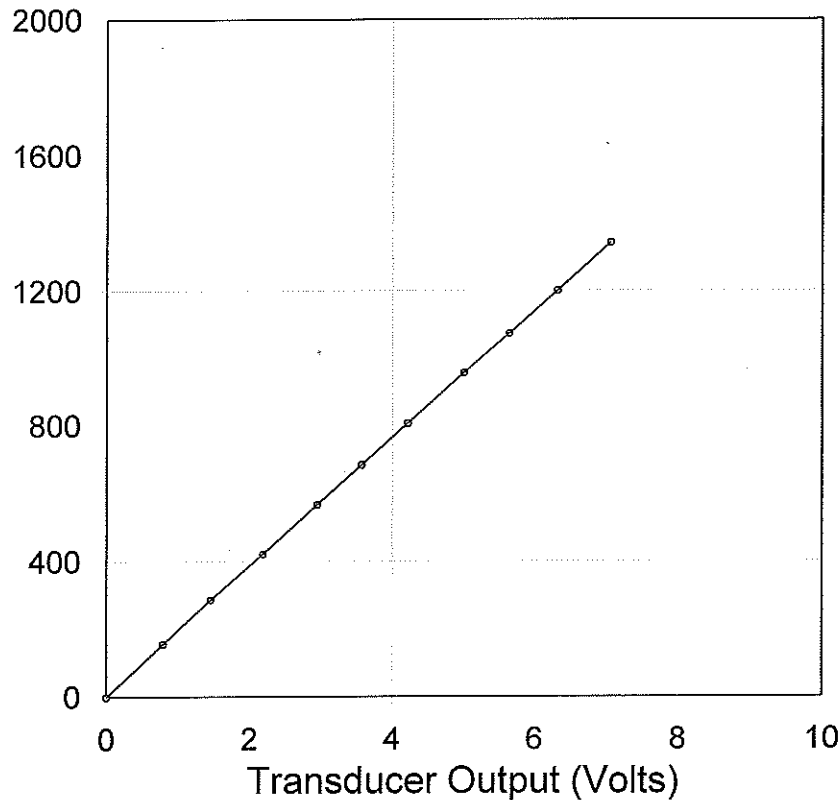

PDA Cal Factor (5.0 V)

94.9 $\mu\epsilon/V$

Applied Strain ($\mu\epsilon$)	Transducer Output (Volts)
0	0.00
157	0.79
286	1.45
420	2.18
567	2.94
683	3.56
807	4.21
955	5.00
1073	5.63
1201	6.31
1343	7.05

Shunt (60.4 K Ω)

2.5 V

General Factor

329.4 $\mu\epsilon/mV/V$

Calibrated by:

Attack

Calibrated on:

06-May-2013

Traceable to N.I.S.T.

Strain Transducer Calibrator System 2011 Version 1.5

Smart Sensor? Yes No Smart Chip

Programmed by: VT Date: 5-6-13 CRC value D7A6