




Pile Dynamics, Inc.

# Pile Dynamics, Inc. Transducer K460

Strain ( $\mu\epsilon$ )

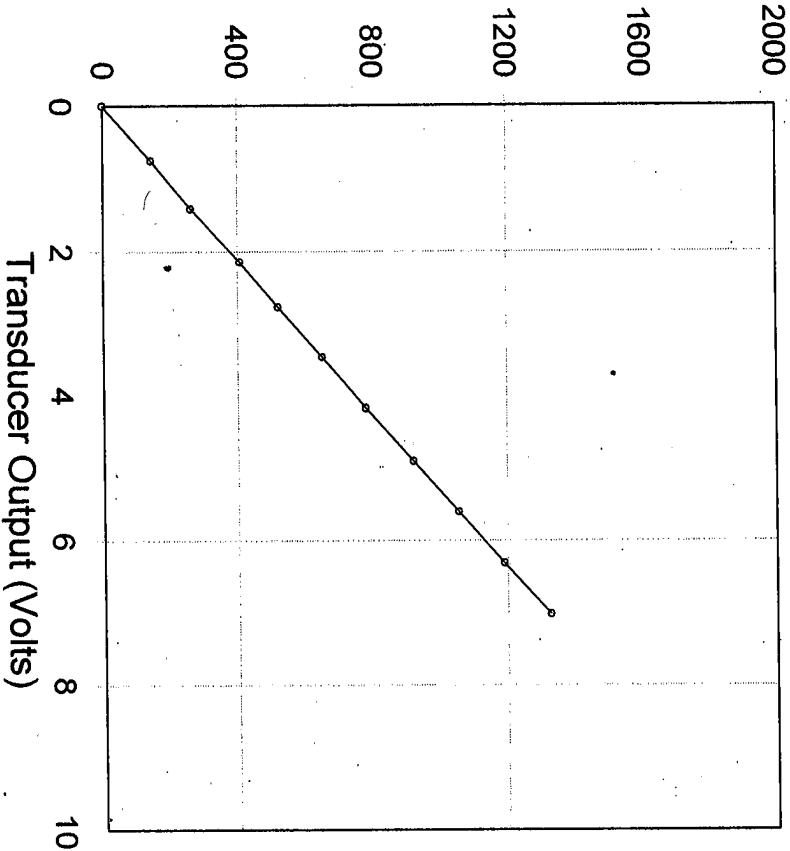

PDA Cal Factor (5.0 V)

94.1  $\mu\epsilon/V$

Applied Strain ( $\mu\epsilon$ )	Transducer Output (Volts)
0	0.00
144	0.74
260	1.40
405	2.14
517	2.77
648	3.47
779	4.18
919	4.90
1052	5.60
1190	6.31
1328	7.02

Shunt (60.4 K $\Omega$ )

2.5 V

General Factor

326.8  $\mu\epsilon/mV/V$

Traceable to N.I.S.T.

Strain Transducer Calibrator System 2011 Version 1.5

Calibrated by: Kay TBI  
Calibrated on: 85-May-2014

Smart Sensor?  Yes  No Smart Chip

Programmed by: KT Date: 5-5-14 CRC value DB68