




Pile Dynamics, Inc.

Pile Dynamics, Inc.

Transducer L032

Strain ($\mu\epsilon$)

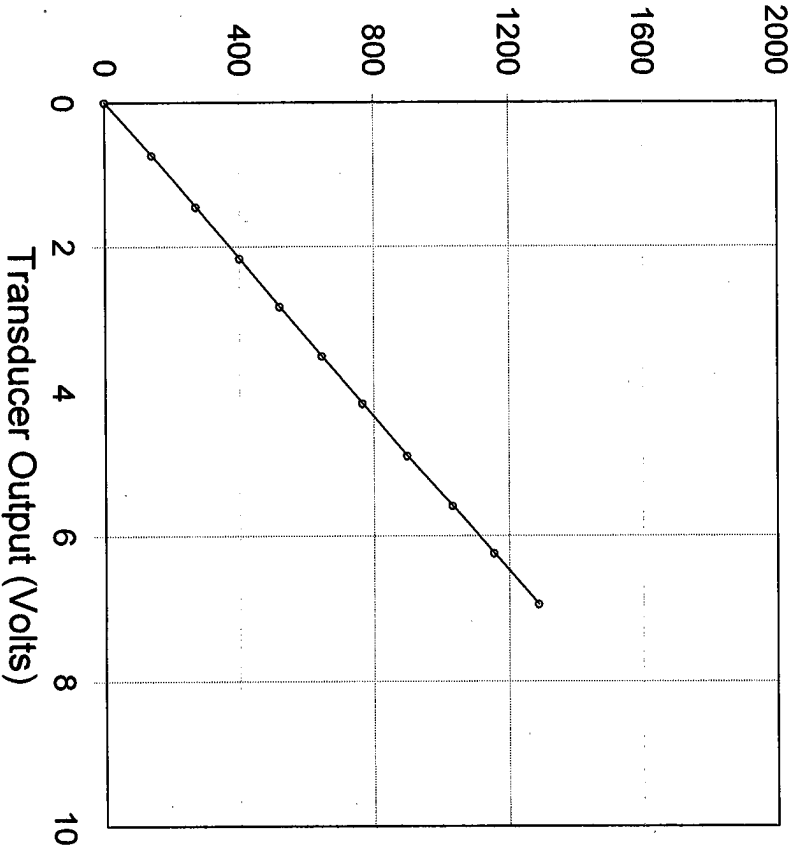

PDA Cal Factor (5.0 V)

92.5 $\mu\epsilon/V$

Applied Strain ($\mu\epsilon$)	Transducer Output (Volts)
0	0.00
140	0.74
269	1.45
399	2.16
519	2.82
643	3.50
765	4.16
898	4.87
1032	5.58
1154	6.24
1287	6.94

Shunt (60.4 K Ω)

2.5 V

General Factor

321.2 $\mu\epsilon/mV/V$

Traceable to N.I.S.T.

Strain Transducer Calibrator System 2011 Version 1.5

Calibrated by: Kay T81
Calibrated on: 20-Aug-2014

Smart Sensor?

Yes

No Smart Chip

Programmed by: KT

Date: 8-20-14

CRC value

A49C