



Pile Dynamics, Inc.


Pile Dynamics, Inc.

Transducer L039

Strain ($\mu\epsilon$)

PDA Cal Factor (5.0 V)

93.0 $\mu\epsilon/V$

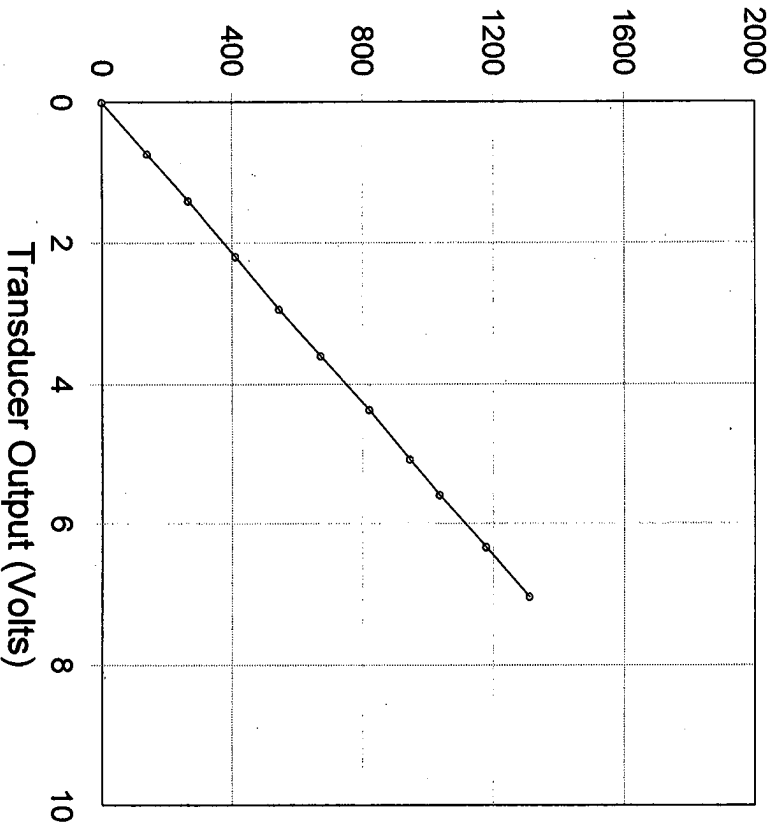

Applied Strain ($\mu\epsilon$)	Transducer Output (Volts)
0	0.00
139	0.74
265	1.41
410	2.19
545	2.93
672	3.59
821	4.36
945	5.07
1035	5.59
1179	6.33
1310	7.03

Shunt (60.4 K Ω)

2.5 V

General Factor

322.8 $\mu\epsilon/mV/V$

Traceable to N.I.S.T.

Calibrated by:

W. Hall

Strain Transducer Calibrator System 2011 Version 1.5

Calibrated on:

22-Sep-2014

Smart Sensor? Yes No Smart Chip

Programmed by:

W

Date: 9-23-14 CRC value

DCB5