


Certificate of Calibration

Pile Dynamics, Inc.

Calibrated by Pile Dynamics, Inc.

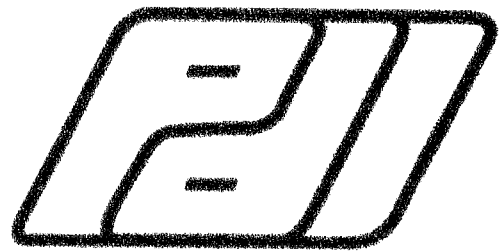

Serial No: 43457 Temperature: 23.8 °C

Model: PE Humidity: 56%

Calibrated on: Channel 4 on 8G 5161 LE

PDA CALIBRATION FACTOR


1223.6 g's/volt

R²: 0.999952 [No chip]

Ref Acc 1: 78268! Cal on: 11Jan2024
986 g's/volt

Ref Acc 2: 78270! Cal on: 11Jan2024
971 g's/volt


Operator: William Johnson


Signed

Reference accelerometer calibrations are traceable to the United States National Institute of Standards and Technology (NIST).

Calibration valid 2 years

From: 17Jul2026

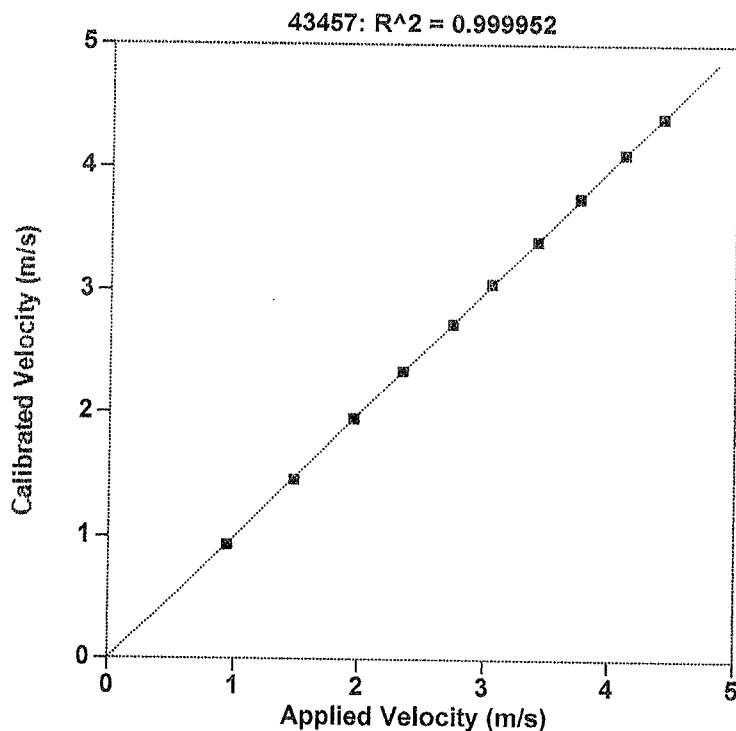

Reference Velocity	S/N 43457 Velocity
m/s	m/s
0.940	0.932
1.475	1.459
1.954	1.950
2.342	2.341
2.728	2.730
3.044	3.054
3.407	3.406
3.745	3.753
4.110	4.110
4.407	4.402
Maximum Acceleration: 942 g's	