


Certificate of Calibration

Pile Dynamics, Inc.

Calibrated by Pile Dynamics, Inc.

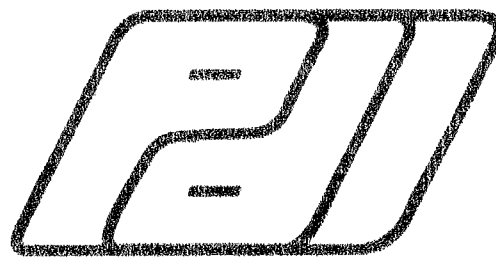

Serial No: K10067 Temperature: 23.1 °C

Model: KICHER PR Humidity: 40%

Calibrated on: Channel 4 on 8G 5161 LE

PDA CALIBRATION FACTOR

411.5 mv/5000g

(82.3 μ v/g)

R²: 0.999969 [Chip programmed]

Ref Acc 1: 85382! Cal on: 24Nov2025
958 g's/volt

Ref Acc 2: 85363! Cal on: 14Nov2025
1000 g's/volt


Operator: William Johnson

Signed

Calibration valid 2 years

From: 16Jul2026

Reference accelerometer calibrations are traceable to the United States National Institute of Standards and Technology (NIST).

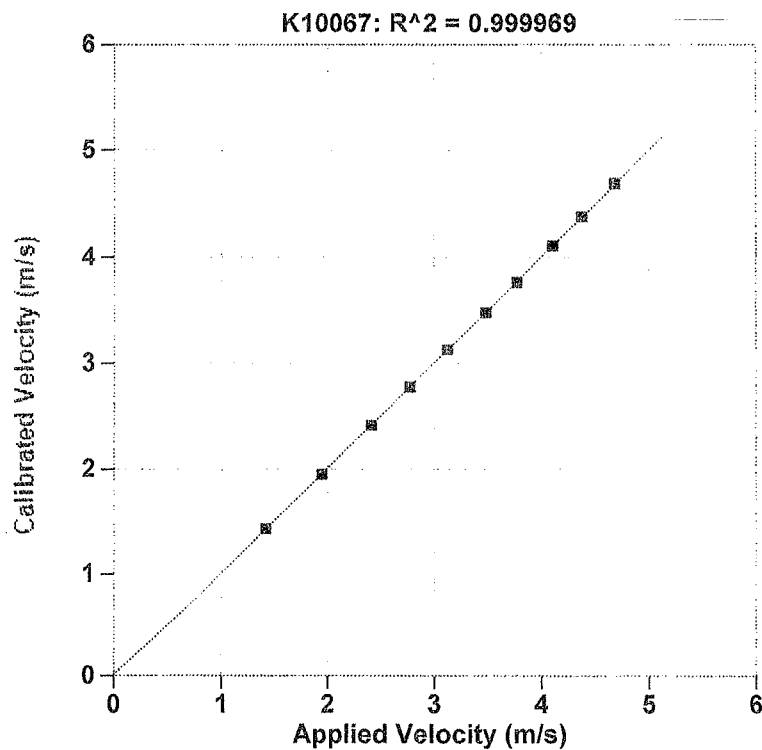

Reference Velocity	S/N K10067 Velocity
m/s	m/s
1.428	1.432
1.951	1.950
2.416	2.412
2.780	2.774
3.125	3.126
3.483	3.481
3.777	3.768
4.112	4.107
4.380	4.387
4.682	4.692
Maximum Acceleration: 1016 g's	