


Certificate of Calibration

Pile Dynamics, Inc.

Calibrated by Pile Dynamics, Inc.

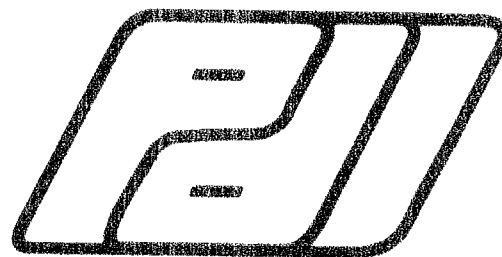

Serial No: 15202 Temperature: 24.2 °C

Model: PE Humidity: 42%

Calibrated on: Channel 3 on 8G 5161 LE

PDA CALIBRATION FACTOR

984.4 g's/volt

R²: 0.999962 [No chip]

Ref Acc 1: 85363! Cal on: 14Nov2025
1000 g's/volt

Ref Acc 2: 85382! Cal on: 24Nov2025
958 g's/volt


Operator: William Johnson

Signed

Reference accelerometer calibrations are traceable to the United States National Institute of Standards and Technology (NIST).

Calibration valid 2 years

From: 10Aug2026

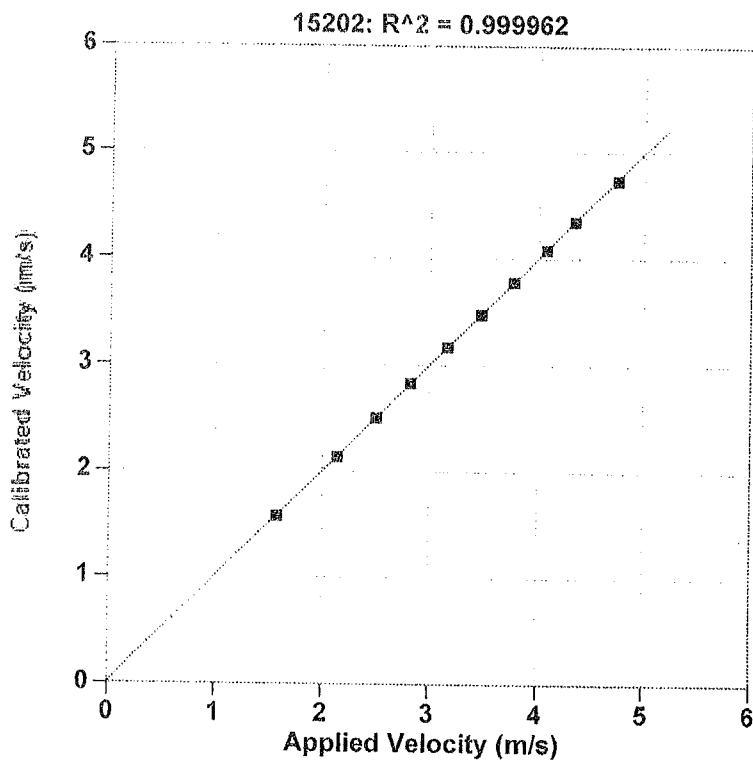

Reference Velocity	S/N 15202 Velocity
m/s	m/s
1.582	1.579
2.138	2.136
2.499	2.505
2.822	2.826
3.165	3.170
3.477	3.479
3.775	3.781
4.079	4.080
4.348	4.347
4.747	4.732

Maximum Acceleration: 1047 g's