


Certificate of Calibration Pile Dynamics, Inc.

Calibrated by Pile Dynamics, Inc.

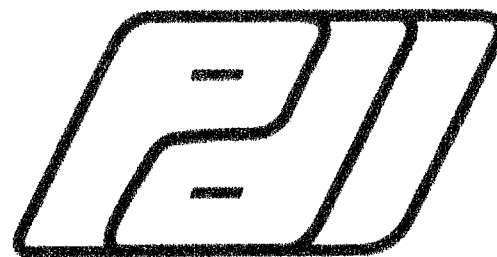

Serial No: K11964 Temperature: 26.1 °C

Model: KICHER PR Humidity: 51%

Calibrated on: Channel 4 on 8G 5161 LE

PDA CALIBRATION FACTOR

389.1 mv/5000g

(77.8 μ v/g)

R²: 0.999963 [Chip programmed]

Ref Acc 1: 85363I Cal on: 14Nov2025
1000 g's/volt

Ref Acc 2: 85382I Cal on: 24Nov2025
958 g's/volt


Operator: William Johnson

Signed

Calibration valid 2 years

From: 01Jul2026

Reference accelerometer calibrations are traceable to
the United States National Institute of Standards and
Technology (NIST).

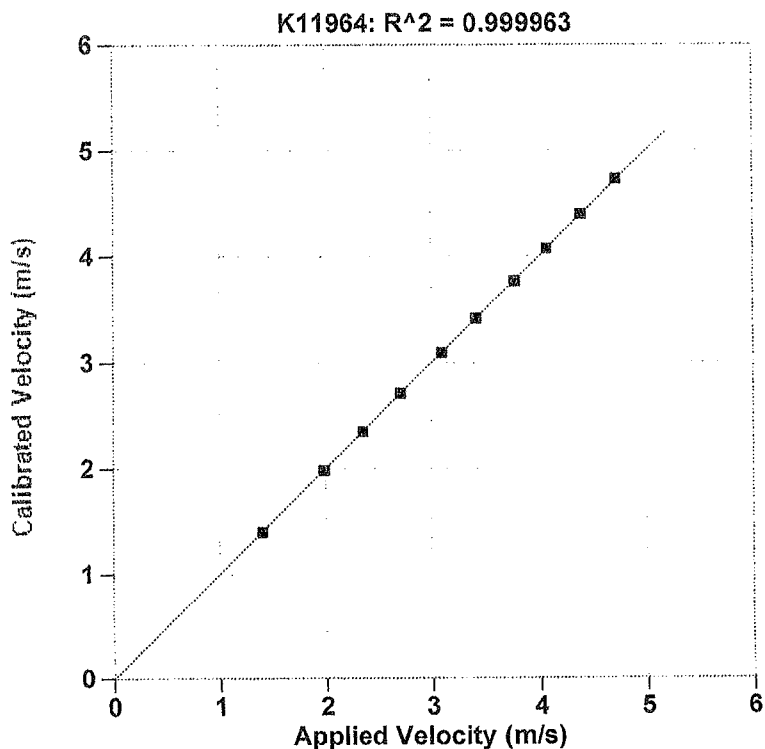

Reference Velocity	S/N K11964 Velocity
m/s	m/s
1.408	1.402
1.989	1.984
2.358	2.355
2.717	2.715
3.103	3.096
3.422	3.426
3.778	3.767
4.074	4.076
4.403	4.408
4.724	4.735

Maximum Acceleration: 1058 g's