


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

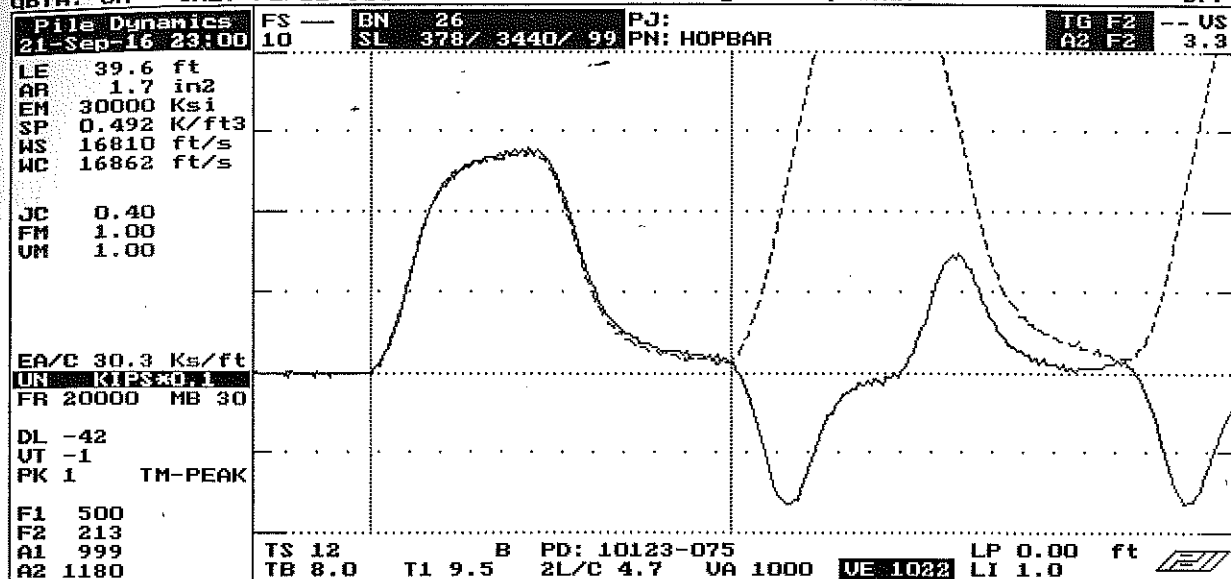

ACCEPT SQ-OFF FL-OFF PR-OFF



contact Pile Dynamics USA
with your questions

tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

<-AT:PIEZORESISTIVE

VMX= 4.4 FMX= 70 AMX= 129
EMX= 0.3 MEX= 137 FVP= 1.00

ACCELEROMETER CALIBRATION

N.I.S.T. Traceable

SERIAL NUMBER: 10123

CALIBRATION FACTOR: 1180 G/V

PAK (*5000): DATE: 22SEP16

PDA OPERATOR: *Ja*

OP: laine [ver:4.05]

AT:PIEZOELECTRIC->