


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

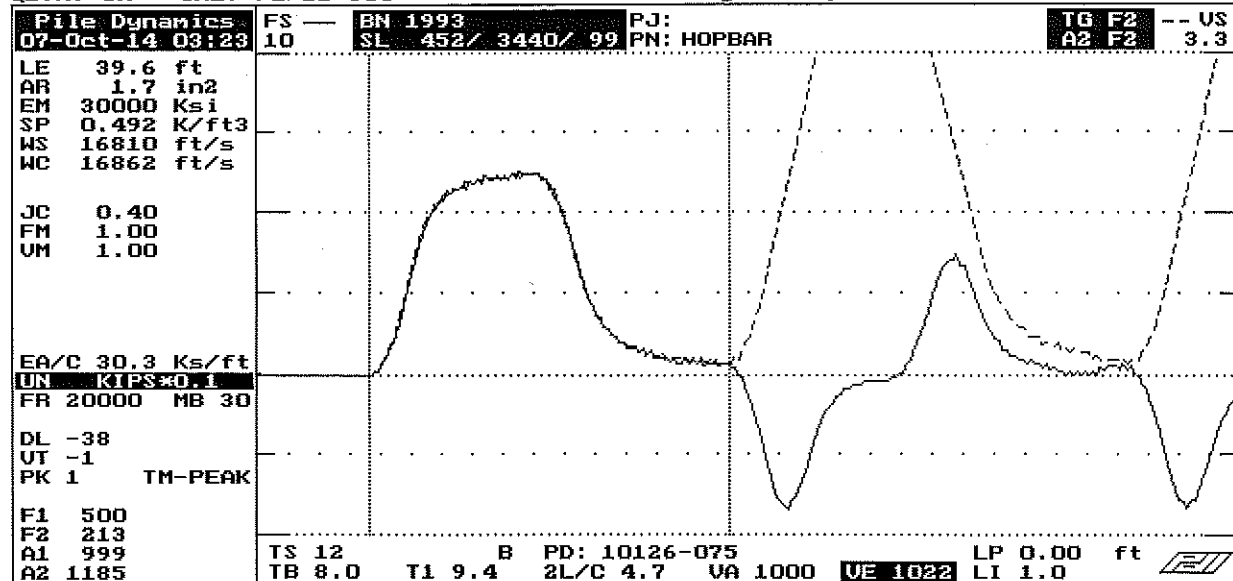

ACCEPT SQ-OFF FL-OFF PR-OFF



contact Pile Dynamics USA
 with your questions
 tel USA - 216 - 831- 6131
 fax USA - 216 - 831- 0916

<-AT:PIEZORESISTIVE

VMX= 4.1 FMX= 63 AMX= 129
 EMX= 0.2 MEX= 123 FVP= 1.00

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 10126

CALIBRATION FACTOR: 1185 %

PAK-(*5000): DATE: 7 OCT 14

PDA OPERATOR: *M. W. W.*

OP: laine lver:4.051

AT:PIEZOELECTRIC->